

Project:
Type:
Date:
Product Code:
Approval:



Flexibility, functionality and superior craftsmanship.

BFR - SPECIFICATIONS MAY CHANGE WITHOUT NOTICE

Specification-grade, recessed, lay-in T-Bar luminaire with framed door. It is ideal for indoor use, where high-efficiency, high-performance and ease of installation are required. Its low-profile body is ideally suited for shallow, or obstructed plenum installations.

FEATURES

- Available with 2, 3, 4, or 6 lamp configuration
- Clear, prismatic diffuser (acrylic)
- Access plate for easy wiring
- Built-in earthquake clips
- Available in T5, T8 or PLL/Biax configurations

OPTIONS

- Various sizes available: 1x4, 2x4, 2x2, and 20x60
- Other finishes are available (consult factory)
- Multi-level switching
- Dimmable and emergency ballast
- Various diffusers available (consult factory)
- Flange kit for drywall ceiling

APPLICATIONS

- Hospitals
- Indoor recessed applications
- Offices
- Retail
- Schools

APPROVALS

- Adheres to CSA and UL standards

OPTICS

Pre-painted body in high-reflectance white. Optional reflector is available in high-reflectance white steel, white aluminum or specular aluminum. Diffuser is a clear acrylic lens with a #12 prismatic pattern (standard).

ELECTRICAL

All components have met all regulatory approvals. Convenient knockout patterns for easy connections and through wiring. Lamp retention through rotary lamp holders.

MOUNTING


Holes provided for chain mounting support for T-Bar ceilings

CONSTRUCTION

Precision-formed, code gauge pre-painted, white steel. Access panel and knock-outs make it ideal for through or standard wiring. Quality, no tool, snap-in ballast cover provides fast access to the ballast for installation and servicing.



PRODUCT DIMENSIONS

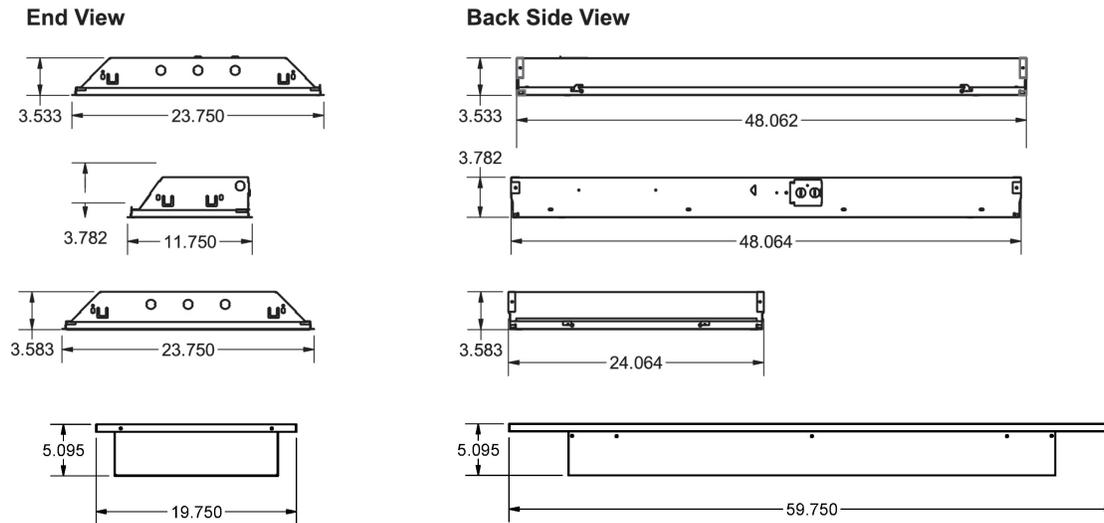

PRODUCT KEY

Fixture Type	Fixture Sizes	Number of Lamps	Lamp Watts	Lamp Type	Ballast Voltage	Ballast Factor	Options
BFR		LP	W				
	1x4	1	28	T5	120	Normal (N)	
	2x4	2	32	T8	120/277 (UNV)	High (H)	
	2x2	3	54		347	Low (L)	
	20x60	4					
		6					

OPTIONS

<p>Battery Back-Up (Needs to be specified)</p> <p>Housing H18 - 20 Gauge Steel Housing</p> <p>H20 - Housing with Passive Air Handling</p>	<p>Reflector</p> <p>R1 - Reflector - White Steel</p> <p>R2 - Reflector - Full - White Aluminum 92%</p> <p>R3 - Reflector - Full - Specular Aluminum 92%</p> <p>Lamps</p> <p>Axxxxx- Lamps installed</p> <p>Fuse Holder</p> <p>F6 - Fuseholder, In-Line Single Pole</p> <p>Flange</p> <p>H14 - Flange (integral) for Drywall Installation</p>	<p>Lens</p> <p>L0 - No Lens Supplied</p> <p>L3 - Lens Acrylic Smooth Opal 0.080 Thick (1x4)</p> <p>L15 - Lens P12 Acrylic 0.110 Thick</p> <p>L20 - Lens P12 Acrylic 0.125" Thick</p> <p>L24 - Lens P12 Polycarbonate 0.125 Thick</p> <p>L55 - Clear Acrylic Lens</p> <p>Wire Guard</p> <p>G1 - Wireguard Heavy Duty, Painted White</p> <p>Louver and Baffle</p> <p>J18 - Parasquare 2x4 - 22.75 x 46.75 - Acrylic, Spec Silver</p>
---	--	---

