

Project:
Type:
Date:
Product Code:
Approval:



Performance, functionality and superior craftsmanship.

BFWB

Contractor-grade, surface and suspended mount fluorescent wrap fixture. It is ideal for indoor use, where high-efficiency, high-performance and ease of installation are required. Its wrap around lens provides excellent downward and upward light distribution.

FEATURES

- Available in 4' or 8' lengths (custom sizes available)
- Pre-painted, high-reflectance white body
- Available with 1, 2, 3, 4 or 6 lamp configurations
- K12 prismatic lens
- Available in T5 or T8

OPTIONS

- 4', 8' and custom lengths available (consult factory)
- Row-mounting available including staggered and continuous row-mounting
- Other finishes are available (consult factory)
- Dimmable and emergency ballast
- 1, 2, 3, 4 or 6 lamps available
- Occupancy and dimming controls

APPLICATIONS

- Garages
- Manufacturing
- Retail stores

APPROVALS

- ETL listed product

OPTICS

Pre-painted body in high-reflectance white. T5 and T8 light sources are available. Diffuser is a clear acrylic lens with a #12 prismatic pattern (standard).

ELECTRICAL

All components have met all regulatory approvals. Convenient knockout patterns for easy connections and through wiring. Lamp retention through rotary lamp holders.

MOUNTING


Can be mounted using suspended or surface-mount configuration. Holes provided for convenient surface mounting or S-hook chain-mounting.

CONSTRUCTION

Pre-painted, high reflectance white body is precision bent for added strength and rigidity. End caps are spot welded and made from 0.030 pre-painted white steel for added rigidity. Heavy-duty K12 bottom lens with linear sides ensure maximum performance and aesthetical value. End knock-outs allow for continuous wiring.



PRODUCT DIMENSIONS

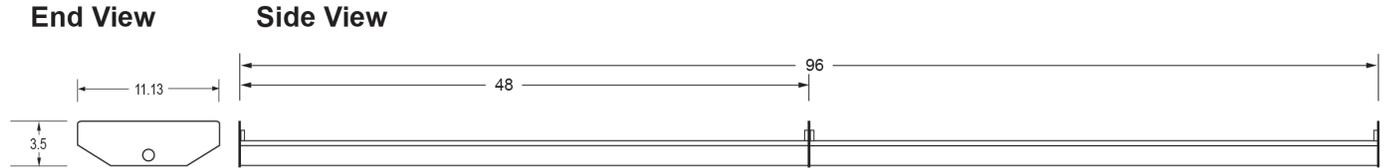

PRODUCT KEY

Fixture Type	Fixture Size	Number of Lamps	Lamp Watts	Lamp Type	Ballast Voltage	Ballast Factor	Options
BFWB		LP	W				
	4'	1	28	T5	120	Normal (N)	
	8'	2	32	T8	120/277 (UNV)	High (H)	
		3	54		347	Low (L)	
		4					
		6					

OPTIONS

<p>Battery Back-Up (Needs to be specified)</p> <p>Lens L0 - No Lens Supplied L20 - Lens P12 Acrylic 0.125" Thick</p> <p>Wireguard G1 - Wireguard Heavy Duty, Painted White</p>	<p>Reflector R1 - Reflector - White Steel R2 - Reflector - Full - White Aluminum 92% R3 - Reflector - Full - Specular Aluminum 92%</p> <p>Sensors W12 - Motion Sensor - 10C W13 - Motion Sensor - 40C</p>	<p>Wire W1XX - Flexible Whip - 16/4 600V White (XX - Length) W2XX - Flexible Whip - 16/4 600V Black (XX - Length) W3XX - Flexible Whip - 16/3 600V White (XX - Length) W4XX - Flexible Whip - 16/3 600V Black (XX Length)</p> <p>Hangers M1 - Speedy Hanger (V-Bracket) M2 - Speedy Hanger & Aircraft Cable 5FT M4 - Aircraft Cable "V-Hanger", 18 Inch</p>
---	---	---

