**BLSPC** - Linear Cove





#### **About The Creston Series**

The BLSPC is a series of LED linear cove strip fixtures, perfect for surface and suspended mounting. It offers high efficiency and is ideal for row-mountable task lighting in modern applications.

#### **Specifications**

Supported Voltage Available Sizes Lifetime Lumens Operating Temperature

Operating Temperature CCT CRI

Dimming Mounting 120-277V, 347V, 120-347V

1', 2', 3', 4', 6', 8'

L70 of 99,000+ hours, L90 of 30,000+ hours 1'1.125L (1126lm) to 8'23L (23191lm) -20°C/+25°C (-40°/+40°C upgrade) 2700K, 3000K, 3500K, 4000K, 5000K, 6500K 80+ standard, 90+ and 95+ available

0-10V Standard

Holes provided for V-hangers, S-hook chain-mounting, or aircraft cables. Optional pendant mount and row-mount brackets.

Knockouts provided for row mounting

#### **Approvals**

- ETL Listed
- Dry and Damp Environment Rated
- Designed and Manufactured in Canada


#### Warranty

5 Year Comprehensive, 10 Year LED

**BLSPC** - Linear Cove





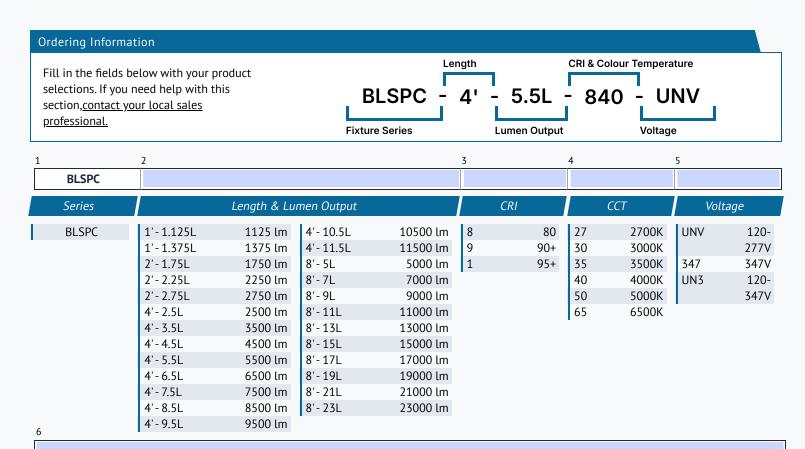

Options											
<u>Cords</u>					<u>Finish</u>		<u>Mounting</u>				
W3xx	Wh	ite 16/3 (Spe	ecify I	Length)	BLANK	Standard Gloss White	M1	V-F	langers		
W4xx	Bla	ck 16/3 (Spe	cify L	ength)	C5	Matte Black	M2xx	V-F	langer with A	Aircra	aft Loop
W59xx	Wh	ite 16/5 (Spe	ecify I	Length)	CUSTOM*	Custom Colour Choice		Cal	oles		
W***	Oth	ner Options A	∖vaila	ble	<b>Dimming</b>		M3xx	Y-T	oggle Aircraf	t Cab	les
	Key.	Cord Length.	Key	Cord Length	B11	0-10V Dimming Leads	M24	Sir	gle Pendant	Mou	nt(3/4 Hub)
	6	6FT	15	15FT	B12	Line voltage dimming	M**	Otl	ner Options A	waila	ıble
	10	10FT	20	20FT	B27	Dim-to-off Driver		Key.	Aircraft	Key	Aircraft
Ex. <b>W406</b> would be 16/3 Black, 6FT				<u>Controls</u>	_		ncy.	Length.	itey	Length	
Motion Sen	sors	EX. 11 10011	outu b	2 10/3 Black, 01 1	WC10*	Encelium Wireless Controls		5	5FT	15	15FT
W26	Pho	otocell Motio	n Sei	nsor	WC18*	NX Wireless Controls		10	10FT	20	20FT
W57	Dimming Motion Sensor (dims to		WC19*	Avi-on Wireless Controls			Ex. <b>M305</b>	would	l be Y-Toggle, 5FT		
	50% when unoccupied)		WC22*	JDRF Wireless Controls	<u>Modular Wi</u>						
W53*	On/Off		<b>Emergency</b>	<u>Driver</u>	W27XYZC						
W8*	High/Low		B17	UL924 6W Battery Back-up	W22XY	Mo	lex Row Mou	ıntin	g Wiring		
WX16	Microwave Dimmable Sensor		B24	UL924 10W Battery Back-up	<u>Warranty</u>						
W**	** Other Options Available		B38	UL924 16W Battery Backup	CL7	10-Year Comprehensive Warrant		sive Warranty			
Wire Guard				F8	UL924 Emergency Relay		Up	grade			
G1	Heavy Duty White		<u>Packaging</u>								
G5	Hea	avy Duty Blad	ck		BLANK	Individually Boxed on Pallets					
					P0	Bulk Packaging					
					P**	Other Options Available					

**BLSPC** - Linear Cove



#### Certifications and Listings

Certifications that apply to this fixture and its possible configurations are listed here. More information available upon request.

Icon Description				
Wireless Controls Available				
95CRI+	90 and 95+ CRI Options Available			
120-347V(UN3) Available				
Intertek	ETL Listed			

#### **Usage Applications**

This fixture can be used in a variety of applications, and is ideal for the following:

Usage Application				
Aisle Lighting				
Displays				
Grocery Stores				
Hospitals				
Offices				
Retail Stores				
Schools				
Task Lighting				
Suspended				
Surface Mount				
Cove Lighting				

#### Warranty Statement

BJ Take products are tested and/or inspected prior to being packaged for shipment and are guaranteed from the day the product is shipped for a period of ten-year LED chip warranty and a five-year comprehensive component warranty. This can be upgraded to a ten-year comprehensive warranty on request.

BLSPC - Linear Cove



#### Wattage information

Below are the available wattage tables for the BLSPC. More information is available upon request.

BLSPC 1', 2' Wattage					
Size	Lumen Output	Actual Lumen Output	Fixture Wattage	Lumens per watt	
1'	1.125	1291.6	8.32	155.2	
1'	1.375	1571.0	10.23	153.6	
2'	1.750	2012.4	12.80	157.2	
2'	2.250	2584.3	16.63	155.4	
2'	2.750	3140.8	20.47	153.4	

BLSPC 4' Wattage						
Size	Lumen Output	Actual Lumen Output	Fixture Wattage	Lumens per watt		
4'	2.5	2852.7	17.9	159.1		
4'	3.5	4023.8	25.6	157.2		
4'	4.5	5167.5	33.3	155.4		
4'	5.5	6281.6	40.9	153.5		
4'	6.5	7367.3	48.6	151.6		
4'	7.5	8425.5	56.3	149.8		
4'	8.5	9454.2	63.9	147.9		
4'	9.5	10454.0	71.6	146.0		
4'	10.5	11426.0	79.3	144.2		
4'	11.5	12369.0	86.9	142.3		

BLSPC 8' Wattage					
Size	Lumen Output	Actual Lumen Output	Fixture Wattage	Lumens per watt	
8'	5	5855.5	35.7	163.9	
8'	7	8261.2	51.0	162.0	
8'	9	10608.0	66.3	160.1	
8'	11	12896.0	81.5	158.2	
8'	13	15126.0	96.8	156.2	
8'	15	17297.0	112.1	154.3	
8'	17	19409.0	127.4	152.4	
8'	19	21462.0	142.6	150.5	
8'	21	23457.0	157.9	148.6	
8'	23	25406.0	173.3	146.6	


BLSPC LIGHT LOSS FACTOR (LLF)					
ССТ	Output%				
2700K	92.95				
3000K	95.51				
3500K	96.80				
4000K	100.00				
5000K	101.28				
90CRI	84.72				


**BLSPC - Linear Cove** 





#### **Dimension Information**


Below you will find the dimensions for all sizes of the BLSPC.

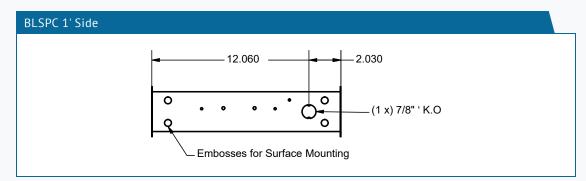





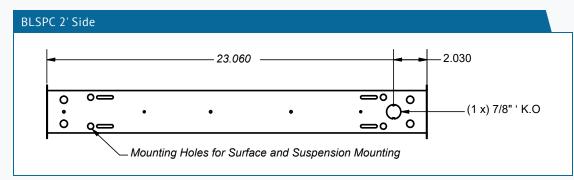




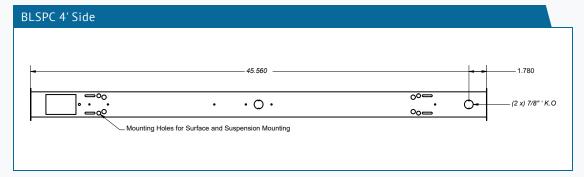




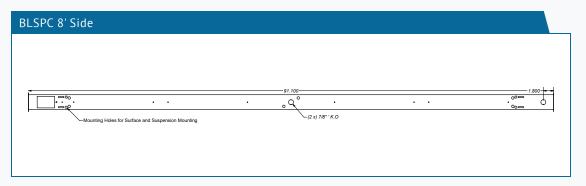




- \* Drawings aren't to scale \* Standard tolerances apply
- \* Specifications may change without notice




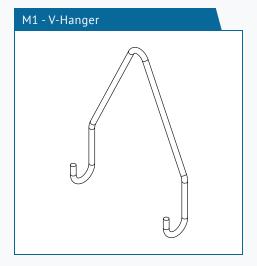





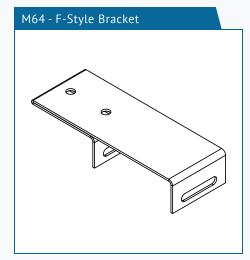







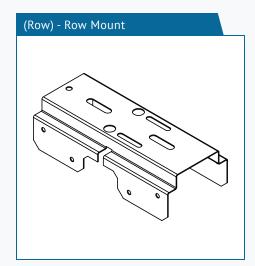


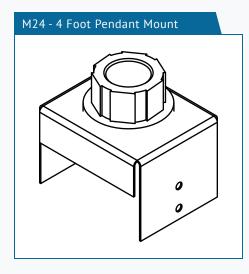

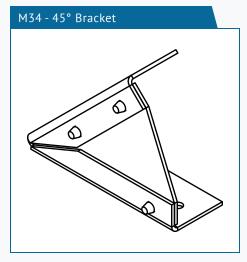



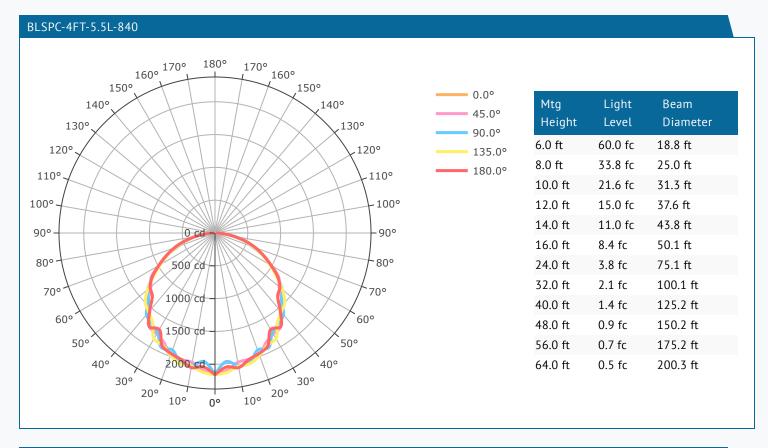


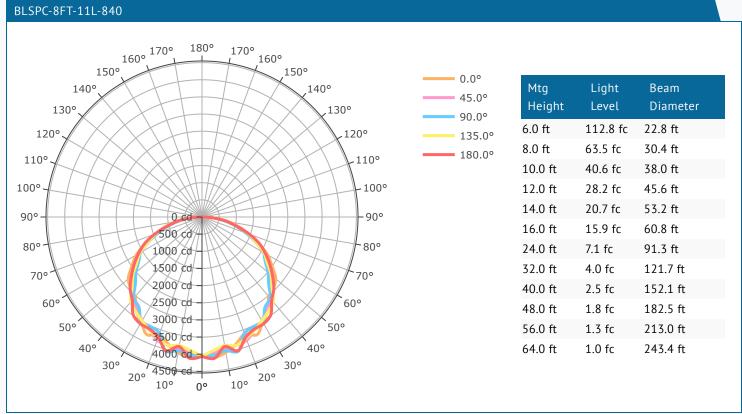

BLSPC - Linear Cove



Emergency Battery Plan - 10W					
Emergency Lighting	Solution System Components	System Operation			
Option Code 'B17' - UL 924 listed components that are factory installed in the luminaire	UL 924 listed 10-watt battery integral to the luminaire	Loss of normal power is detected by the B17 emergency light solution and the power supply is switched automatically to the 10-watt integral battery pack which powers the emergency LED lighting driver.			
	UL 924 listed LED emergency lighting driver integral to the luminaire	The battery pack and emergency LED driver are UL 924 certified to provide a minimum of 90-minutes of emergency lighting.			
	Wiring options for both switched and unswitched emergency lighting				

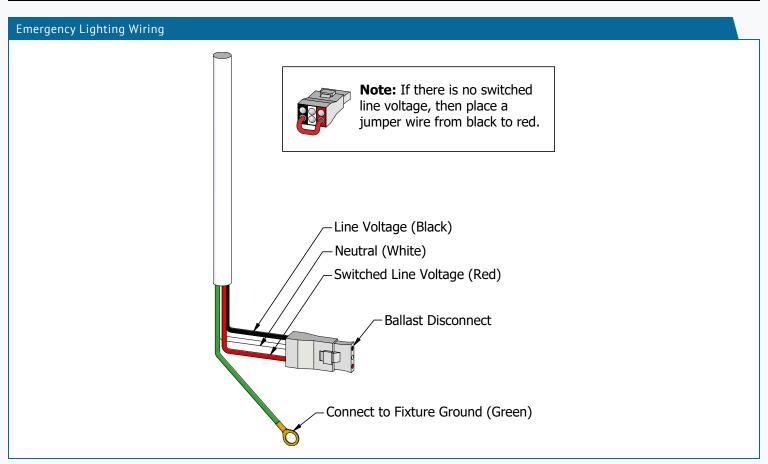

#### Important Information

More information on emergency lighting options and configurations available on request.

BLSPC - Linear Cove

#### Gallery Information

Below you will find images of relevant products and configurations for the BLSPC.







