

The Rankin Series

BRLR - Recessed Retrofit Kit

Project

Date

Part

Type



About The Rankin Series

The BRLR is an LED retrofit kit offering up to 50% in energy savings over a traditional T8 fixture. It has been designed to convert existing 2x2, 1x4 and 2x4 recessed troffers from T8 or T12 to LED. Its flexibility and simple installation make it easy to take advantage of improved energy-efficiency and performance.

Specifications

Supported Voltage	120-277V, 347V, 120-347V, 480V
Available Sizes	1x4', 2x2', 2x4'
Lifetime	L70 of 110,000+ hours, L90 of 34,000+ hours
Operating Temperature	-20°C/+25°C
Lumens	Lumen output ranging from 2L (2071lm) to 6L (6064lm)
CCT	2700K, 3000K, 3500K, 4000K, 5000K, 6500K
CRI	80+ standard, 90+ and 95+ available
Dimming	0-10V Standard

Approvals

- ETL Listed
- DLC Listed
- Dry and Damp Environment Rated
- Designed and Manufactured in Canada

Warranty


- 5 Year Comprehensive, 10 Year LED

The Rankin Series

BRLR - Recessed Retrofit Kit

Ordering Information

Fill in the fields below with your product selections. If you need help with this section, [contact your local sales professional](#).

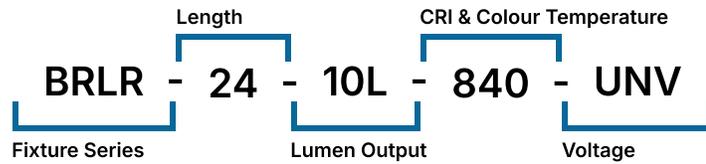

1	2	3	4	5	6					
Series	Size		Lumen Output		CRI	CCT		Voltage		
BRLR	14	1x4'	1x4-2L	2000 lm	8	80	27	2700K	UNV	120-
	22	2x2'	1x4-3L	3000 lm	9	90+	30	3000K		277V
	24	2x4'	1x4-4L	4000 lm	1	95+	35	3500K	347	347V
			1x4-5L	5000 lm			40	4000K	UN3	120-
			2x2-2L	2000 lm			50	5000K		347V
			2x2-3L	3000 lm			65	6500K	480	480V
			2x2-4L	4000 lm						
			2x2-5L	5000 lm						
			2x4-3L	3000 lm						
			2x4-4L	4000 lm						
			2x4-5L	5000 lm						
			2x4-6L	6000 lm						
			2x4-7L	7000 lm						
			2x4-8L	8000 lm						
			2x4-9L	9000 lm						
			2x4-10L	10000 lm						

Options

Lenses

BLANK | Frosted Lens

Finish

BLANK | Standard Gloss White

C5 | Matte Black

CUSTOM* | Custom Colour Choice

Dimming

B11 | 0-10V Dimming Leads

B12 | Line Voltage Dimming

B27 | Dim-to-off Driver

B** | Other Options Available*

Emergency Driver

B17 | UL924 10W Battery Backup

B36 | UL924 14W 2 Hour Battery Backup

F8 | UL924 Emergency Relay

Packaging

BLANK | Individually Boxed on Pallets

P0 | Bulk Packaging

Warranty

CL7 | 10-Year Comprehensive Warranty Upgrade

The Rankin Series

BRLR - Recessed Retrofit Kit

Documentation and Resources

All files and resources are available on our website for download. Files and resources are also embedded as links in this document, listed below. Additional files may be available upon request.

Please contact your local sales agent [here](#) or contact sales@bjtake.com for more information.

 [BRLR 14 Retrofit Kit Instructions 2025](#)

 [BRLR Retrofit Kit Instructions 2025](#)

 [BRLR - Photometry](#)

Certifications and Listings

Certifications that apply to this fixture and its possible configurations are listed here. More information available upon request.

Icon	Description
	ETL Listed
	DLC Listed
	Wireless Controls Available
	90 and 95+ CRI Options Available
	120-347V(UN3) Available

Usage Applications

This fixture can be used in a variety of applications, and is ideal for the following:

Usage Application
Manufacturing Facilities
Storage
Offices
Schools
Retail Stores
Distribution Facilities
Processing Plants
Aisle Lighting


Warranty Statement

BJ Take products are tested and/or inspected prior to being packaged for shipment and are guaranteed from the day the product is shipped for a period of ten-year LED chip warranty and a five-year comprehensive component warranty. This can be upgraded to a ten-year comprehensive warranty on request.


The Rankin Series

BRLR - Recessed Retrofit Kit


BRLR 1x4' Side

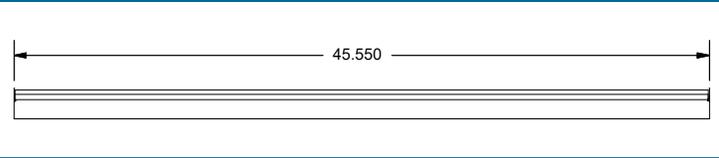


BRLR 1x4' End

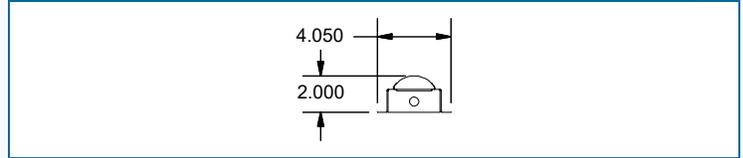


BRLR 2x2' Side

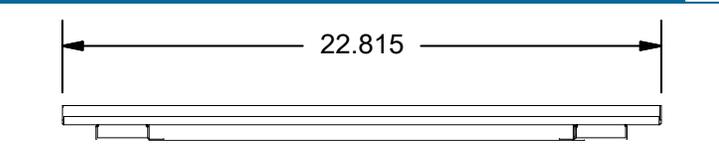


BRLR 2x2' End

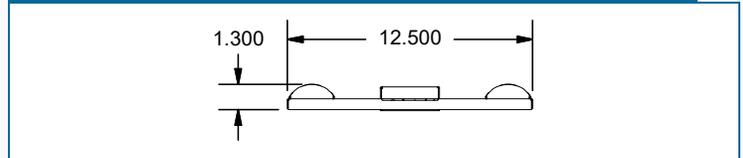

BRLR 2x4' Side

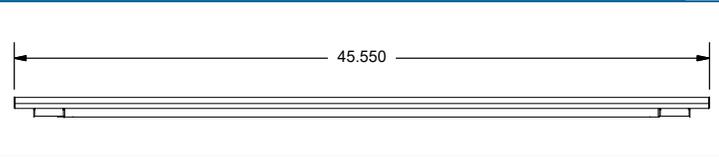

BRLR 2x4' End

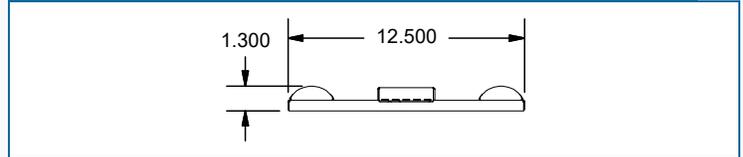

BRLR 1x4' Wattage

Length	Lumen Output	Actual Lumen Output	Fixture Wattage	Lumens per Watt
1x4	2L	1916	15.0	127.73
1x4	3L	2807	22.4	125.31
1x4	4L	3660	29.8	122.82
1x4	5L	4476	37.2	120.32

BRLR 2x2' Wattage

Length	Lumen Output	Actual Lumen Output	Fixture Wattage	Lumens per Watt
2x2	2L	1971	15.4	127.98
2x2	3L	2864	22.7	126.17
2x2	4L	3734	29.9	124.89
2x2	5L	4577	37.2	123.04

BRLR 2x4' Wattage


Length	Lumen Output	Actual Lumen Output	Fixture Wattage	Lumens per Watt
2x4	3L	3010	21.3	141.31
2x4	4L	4029	28.8	139.90
2x4	5L	5026	36.3	138.46
2x4	6L	6001	43.8	137.00
2x4	7L	6955	51.3	135.58
2x4	8L	7886	58.9	133.89
2x4	9L	8795	66.4	132.45
2x4	10L	9679	73.9	130.97

- * Drawings not to scale
- * Standard tolerances apply
- * Specifications may change without notice

The Rankin Series

BRLR - Recessed Retrofit Kit

BRLR-24-10L-840

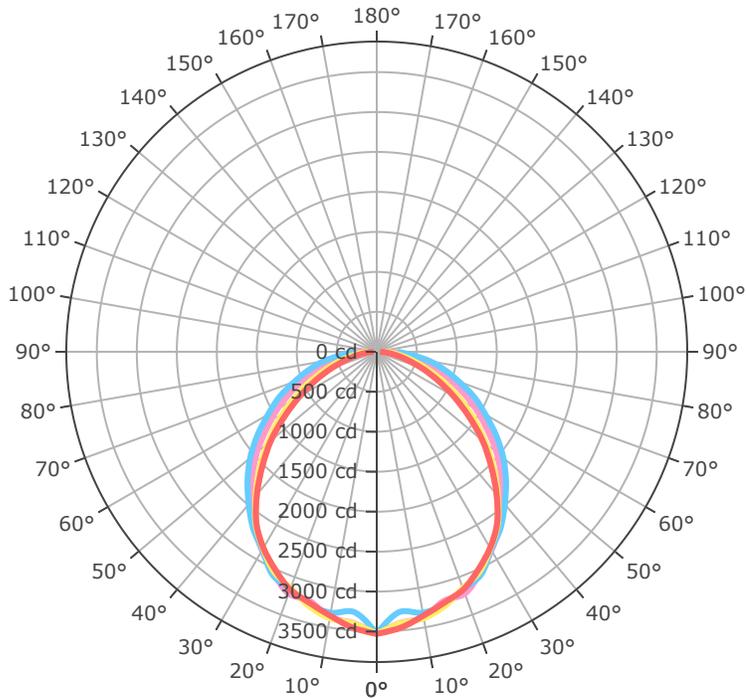

- 0.0°
- 45.0°
- 90.0°
- 135.0°
- 180.0°

Mtg Height	Light Level	Beam Diameter
6.0 ft	98.0 fc	14.0 ft
8.0 ft	55.1 fc	18.6 ft
10.0 ft	35.3 fc	23.3 ft
12.0 ft	24.5 fc	28.0 ft
14.0 ft	18.0 fc	32.6 ft
16.0 ft	13.8 fc	37.3 ft
24.0 ft	6.1 fc	55.9 ft
32.0 ft	3.4 fc	74.6 ft
40.0 ft	2.2 fc	93.2 ft
48.0 ft	1.5 fc	111.8 ft
56.0 ft	1.1 fc	130.5 ft
64.0 ft	0.9 fc	149.1 ft

The Rankin Series


BRLR - Recessed Retrofit Kit

Retrofit Lighting by **BJTAKE**
LIGHTING

Emergency Battery Plan - 10W

Emergency Lighting	Solution System Components	System Operation
Option Code 'B17' - UL 924 listed components that are factory installed in the luminaire	UL 924 listed 10-watt battery integral to the luminaire	Loss of normal power is detected by the B17 emergency light solution and the power supply is switched automatically to the 10-watt integral battery pack which powers the emergency LED lighting driver.
	UL 924 listed LED emergency lighting driver integral to the luminaire	The battery pack and emergency LED driver are UL 924 certified to provide a minimum of 90-minutes of emergency lighting.
	Wiring options for both switched and unswitched emergency lighting	

Emergency Lighting Wiring

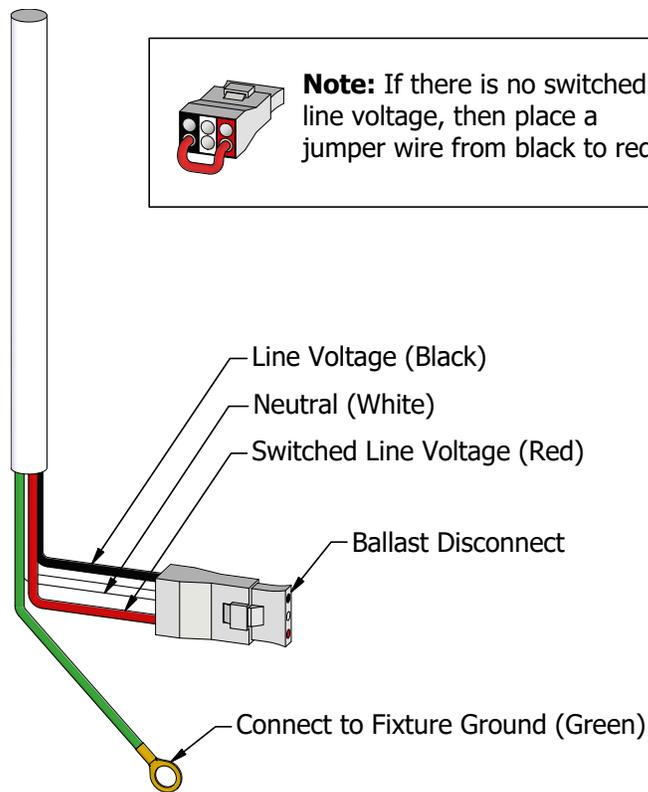

Important Information

More information on emergency lighting options and configurations available on request.

The Rankin Series

BRLR - Recessed Retrofit Kit

Retrofit Lighting by **BJTAKE**
LIGHTING

Gallery Information

Below you will find images of relevant products and configurations for the BRLR.

