BLCS

Project Date

Part Type



About the BLCS

The BLCS LED curved strip offers a clean, professional look for spaces where efficient task lighting is required. This solution offers UN3(120-347V) voltage, color-selectable CCT and wattage options. The fixture has a hinge-open design for toolless maintenance.

Specifications

Supported Voltage Available Sizes Lumens

Operating Temperature

CCT CRI

Dimming Mounting

Sensor Power Factor 120-347VAC

4' (47.51"x2.6"x2.7")

3250lm(25w), 4500lm(35w), 5800lm(45w)

-20°/+40°C

3500K, 4000K, 5000K (selectable)

80 CRI

0-10V Standard


suspended or surface-mount

supports 12V AUX

>0.9

Approvals

- Dry and Damp Environment Rated
- ETL Listed
- DLC Premium

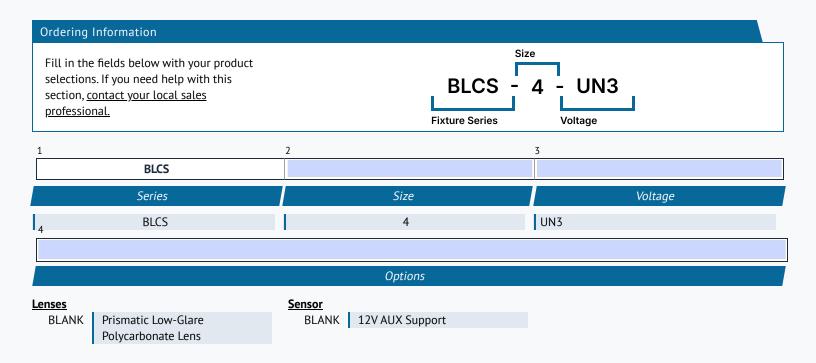

Documentation and Resources

All files and resources are available on our website for download. Files and resources are also embedded as links in this document, listed below. Additional files may be available upon request.

Please contact your local sales agent here or contact sales@bjtake.com for more information.



BLCS Specification Sheet, 2025

Certifications and Listings

Certifications that apply to this fixture and its possible configurations are listed here. More information available upon request.

lcon	Description
120-347	120-347V(UN3) Available
DLC LISTED PREMIUM	DLC Premium
c us	ETL Listed

Usage Applications

This fixture can be used in a variety of applications, and is ideal for the following:

Usage Application
Manufacturing Facilities
Storage
Offices
Schools
Retail Stores
Distribution Facilities
Processing Plants
Aisle Lighting

Warranty Statement

This product is covered by a modified BJ TAKE Lighting warranty, effective from the date of shipment. The warranty guarantees all components for a period of 5 years.

Gallery Information

Below you will find images of relevant products and configurations for the BLCS.

