

Project		Date	
Part		Type	



About the BLVT

The BLVT LED vapor-tight offers a clean, professional look for spaces where efficient impact resistant vapour-tight lighting is required. This solution offers UN3(120-347V) voltage, color-selectable CCT and wattage options, and included brackets for ceiling, suspended, or wall-mount applications.

Specifications


Supported Voltage	120-347VAC
Available Sizes	4'
Lumens	3900lm(30w), 5200lm(40w), 6500lm(50w)
Operating Temperature	-20°/+40°C
CCT	3500K, 4000K, 5000K (selectable)
CRI	80 CRI
Dimming	0-10V Standard
Mounting	ceiling, suspended, or wall-mount
Sensor	supports 12V AUX
Power Factor	>0.9

Approvals

- Dry and Damp Environment Rated
- ETL Listed
- DLC Premium
- NSF Rated
- 5VA Rated Housing

Ordering Information

Fill in the fields below with your product selections. If you need help with this section, [contact your local sales professional](#).

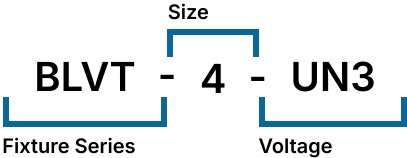

1	2	3
<input type="text" value="BLVT"/>	<input type="text"/>	<input type="text"/>
Series	Size	Voltage
4		
<input type="text" value="BLVT"/>	<input type="text" value="4"/>	<input type="text" value="UN3"/>
<input type="text"/>		
Options		

Lenses

- BLANK
- Impact Resistant Acrylic Low-Glare Lens

Mounting

- BLANK
- Stainless Steel Mounting Brackets


Sensor

- BLANK
- 12V AUX Support

Documentation and Resources





All files and resources are available on our website for download. Files and resources are also embedded as links in this document, listed below. Additional files may be available upon request.

Please contact your local sales agent [here](#) or contact sales@bjtake.com for more information.

 BLVT Specification Sheet, 2025

Certifications and Listings

Certifications that apply to this fixture and its possible configurations are listed here. More information available upon request.

Icon	Description
	120-347V(UN3) Available
	DLC Premium
	ETL Listed
	NSF Rated

Usage Applications

This fixture can be used in a variety of applications, and is ideal for the following:

Usage Application
Food Processing Plants
Manufacturing Facilities
Storage & Warehousing
Wash Bays And Wet Environments
Outdoor Parking Structures
Agricultural Barns

Warranty Statement

This product is covered by a modified BJ TAKE Lighting warranty, effective from the date of shipment.
The warranty guarantees all components for a period of 5 years.