
The Bridgewater Series BLB - Overbed Hospital-Grade

Project	Date
Part	

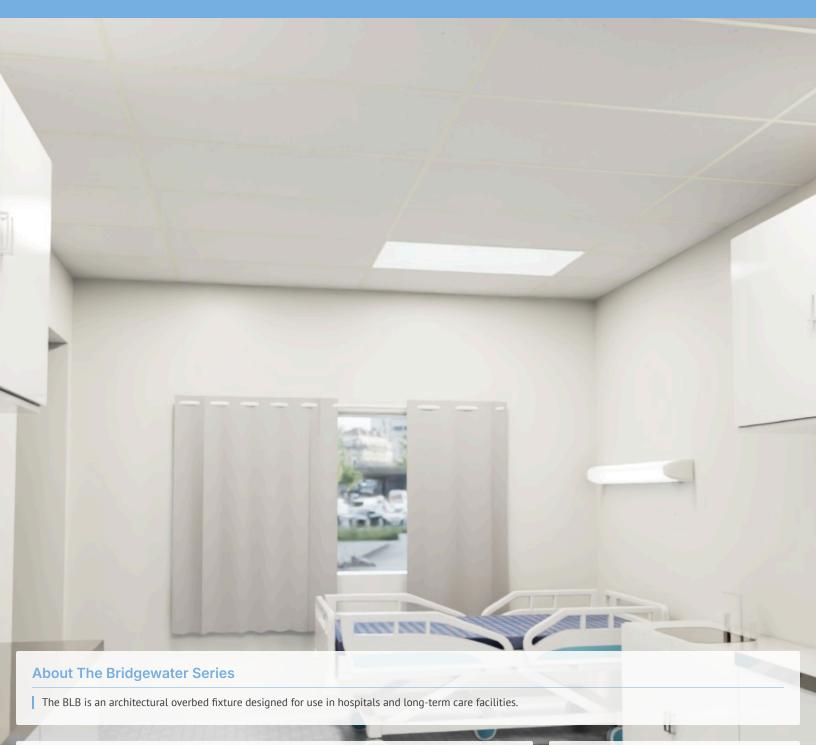

Specifications

Supported Voltage Available Sizes Lifetime Lumens CCT CRI

120-277V, 347V, 120-347V

2', 3', 4'

L70 of 100,000+ hours Down 1L-4L, Up 1L-4L


2700K, 3000K, 3500K, 4000K, 5000K, 6500K 80+ standard, 90+ and 95+ available

Dimming 0-10V Standard Mounting Surface-mount

Approvals

- Made with UL Listed components
- Designed and Manufactured in Canada



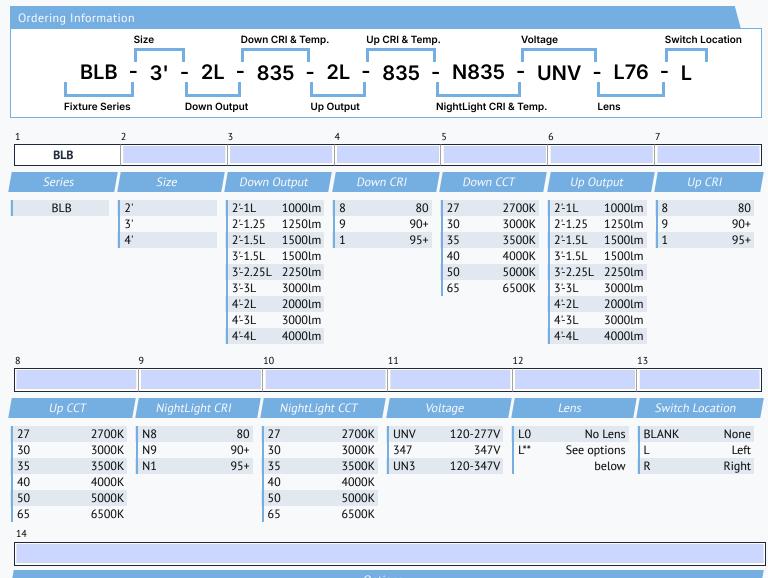

L0 N L76 Fi	es on Page 5 No Lens Frosted Bed Lens w/ nickel	Switch Loca BLANK	tion None	<u>Emergency</u>	<u>Driver</u>
L76 Fi	rosted Bed Lens w/ nickel		None		
re			HOHE	B17	UL924 10W Battery Back-up
		S1	Pull Chain On/Off	F8	UL924 Emergency Relay
hı	ear/wood center applique and	S2	Pull Chain 4 Position (down, up,	Mounting	
U	orushed nickel colored end caps		up&down, off)	BLANK	J-Box Surface Mounting
L78 Fi	rosted Bed Lens w/ white	NightLight Switch		<u>Finish</u>	_
aį	applique and white end caps	BLANK	None	BLANK	Matte White with Silver Ion
L85 Fi	Frosted Bed Lens w/ bronze	S1	Pull Chain On/Off		Technology
re	ear/wood center applique and	S5	Toggle	C5	Matte Black
	oronze colored end caps	Dimming		CUSTOM*	Custom Colour Choice
	Frosted Bed Lens w/ nickel	B10	DALI	<u>Packaging</u>	
	rear/solid white center applique	B11	0-10V Dimming Leads	BLANK	Individually Boxed on Pallets
aı	and white marble colored end	B12	Line voltage dimming	P0	Bulk Packaging
Ca	caps	B27	Dim-to-off Driver	<u>Warranty</u>	3 3
		B**	Other Options Available*	CL7	10-Year Comprehensive Warra

The Bridgewater Series

BLB - Overbed Hospital-Grade



All files and resources are available on our website for download. Files and resources are also embedded as links in this document, listed below. Additional files may be available upon request.

Please contact your local sales agenthereor contactsales@bjtake.comfor more information.



BLB Specification Sheet, 2025

Certifications that apply to this fixture and its possible configurations are listed here. More information available upon request.


lcon	Description				
*	Wireless Controls Available				
95CRI+	90 and 95+ CRI Options Available				
120-347	120-347V(UN3) Available				


This fixture can be used in a variety of applications, and is ideal for the following:


Usage Application				
Hospitals				
Long-Term Care				


BJ Take products are tested and/or inspected prior to being packaged for shipment and are guaranteed from the day the product is shipped for a period of ten-year LED chip warranty and a five-year comprehensive component warranty. This can be upgraded to a ten-year comprehensive warranty on request.




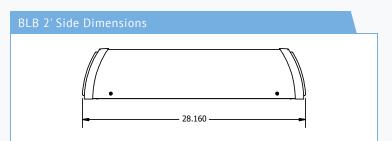


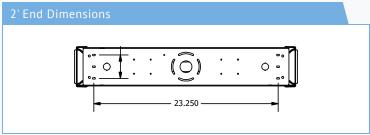


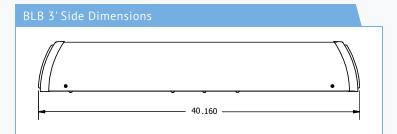

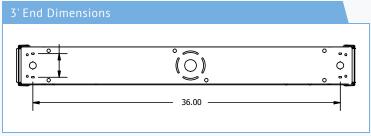

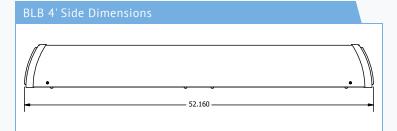

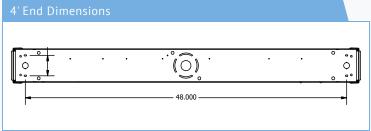

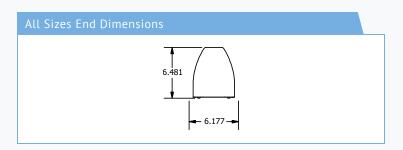

BLB Wattage					
DownLight Output	DownLight Wattage	UpLight Output	UpLight Wattage		
1L	8.9	1L	8.9		
1.25	11.4	1.25L	11.4		
1.5L	13.9	1.5L	13.9		
2L	19.0	2L	19.0		
2.25L	20.9	2.25L	20.9		
3L	29.0	3L	29.0		
4L	40.9	4L	40.9		


^{*} Drawings aren't to scale * Standard tolerances apply

^{*} Specifications may change without notice



Gallery Information

Below are the end cap/lens applique finish configurations for the BLB.

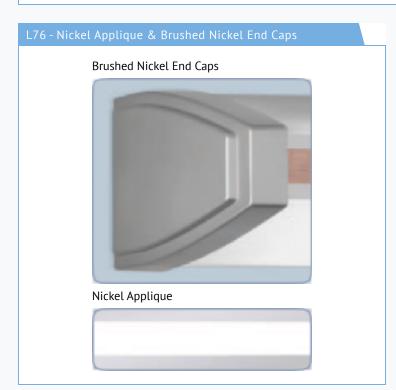









Gallery Information

Below you will find images of relevant products and configurations for the BLB.







