

The Ashcroft Series

BLLA - Suspended Mount High Bay

Project

Date

Part

Type

About The Ashcroft Series

The BLLA is a series of suspended mount LED low bay luminaires. Its rugged design and excellent output make it an ideal fixture for low and high bay applications

Specifications

Supported Voltage	120-277V, 347V, 120-347V
Available Sizes	2', 4', 8'
Lifetime	L70 of 145,000+ hours, L90 of 41,000+ hours
Lumens	2' 10L - 4' 24L
CCT	2700K, 3000K, 3500K, 4000K, 5000K, 6500K
CRI	80+ standard, 90+ and 95+ available
Dimming	0-10V Standard
Mounting	Holes provided for v-hangers, s-hook chain mounting, or aircraft cables. Pendant mount and surface mount brackets available.

Approvals

- ETL Listed
- Dry and Damp Environment Rated
- Designed and Manufactured in Canada

Warranty


- 5 Year Comprehensive, 10 Year LED

The Ashcroft Series

BLLA - Suspended Mount High Bay

Ordering Information

Fill in the fields below with your product selections. If you need help with this section, [contact your local sales professional.](#)

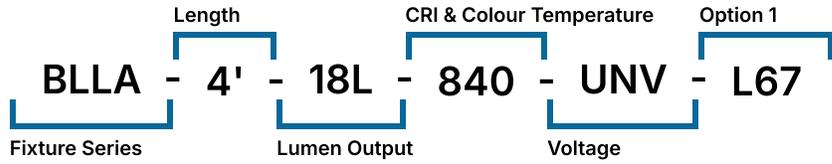

1	2	3	4	5	6
Series	Length	Lumen Output	CRI	CCT	Voltage
BLLA	2'	2'-10L 10000lm	8 80	27 2700K	UNV 120-277V
	4'	2'-12 12000lm	9 90+	30 3000K	347 347V
		4'-14 14000lm	1 95+	35 3500K	UN3 120-347V
		4'-15 15000lm	0 THRIVE	40 4000K	
		4'-18 18000lm		50 5000K	
		4'-20L 20000lm		65 6500K	
		4'-24L 24000lm			

Options

Lenses

L0	No Lens
L55	Clear Acrylic
L67	Frosted Acrylic (Impact Resistant)

Cords

W3xx	White 16/3 (Specify Length)
W4xx	Black 16/3 (Specify Length)
W59xx	White 18/5 (Specify Length)
W***	Other Options Available*

Key.	Cord Length.	Key	Cord Length
6	6FT	15	15FT
10	10FT	20	20FT

Ex. **W406** would be 16/3 Black, 6FT

Dimming

B11	0-10V Dimming Leads
B12	Line Voltage Dimming
B27	Dim-to-off Driver

Controls

WC10*	Encelium Wireless Controls
WC18*	NX Wireless Controls
WC19*	Avi-on Wireless Controls
WC22*	JDRF Wireless Controls

Motion Sensors

W26	Photocell Motion Sensor
W57	Dimming Motion Sensor (dims to 50% when unoccupied)
W53*	On/Off
W8*	High/Low
WX16	Microwave Dimmable Sensor
W**	Other Options Available*

Wire Guard

G1	Heavy Duty White
G5	Heavy Duty Black

Emergency Driver

B24	UL924 20W Battery Back-up
F8	UL924 Emergency Relay

Packaging

BLANK	Individually Boxed on Pallets
P0	Bulk Packaging

Mounting

BLANK	Surface Mount
M1	V-Hangers
M2xx	V-Hanger with Aircraft Loop Cables
M3xx	Y-Toggle Aircraft Cables
M24	Single Pendant Mount(3/4 Hub)
M25	Surface Mount
M**	Other Options Available*

Key.	Aircraft Length.	Key	Aircraft Length
5	5FT	15	15FT
10	10FT	20	20FT

Ex. **M305** would be Y-Toggle, 5FT

Warranty

CL7	10-Year Comprehensive Warranty Upgrade
-----	--

The Ashcroft Series

BLLA - Suspended Mount High Bay

High Bay Lighting by 

Documentation and Resources

All files and resources are available on our website for download. Files and resources are also embedded as links in this document, listed below. Additional files may be available upon request.

Please contact your local sales agent [here](#) or contact sales@bjtake.com for more information.

 [BLLA - Installation Instructions](#)

 [BLLA - Photometry.zip](#)

Certifications and Listings

Certifications that apply to this fixture and its possible configurations are listed here. More information available upon request.

Icon	Description
	ETL Listed
	Wireless Controls Available
	90 and 95+ CRI Options Available
	120-347V(UN3) Available

Usage Applications

This fixture can be used in a variety of applications, and is ideal for the following:

Usage Application
Manufacturing Facilities
Storage & Warehousing
Retail Stores
Gymnasiums
Grocery Stores


Warranty Statement

BJ Take products are tested and/or inspected prior to being packaged for shipment and are guaranteed from the day the product is shipped for a period of ten-year LED chip warranty and a five-year comprehensive component warranty. This can be upgraded to a ten-year comprehensive warranty on request.


The Ashcroft Series

BLLA - Suspended Mount High Bay


BLLA 2' Side

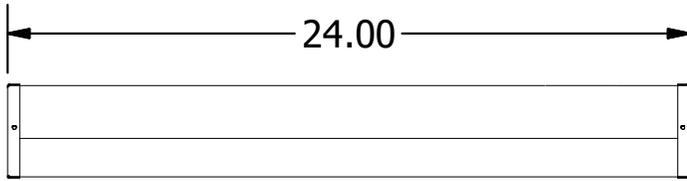


BLLA 2' End

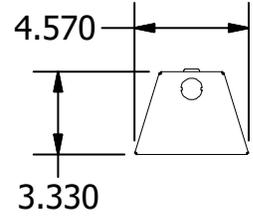


BLLA 4' Side

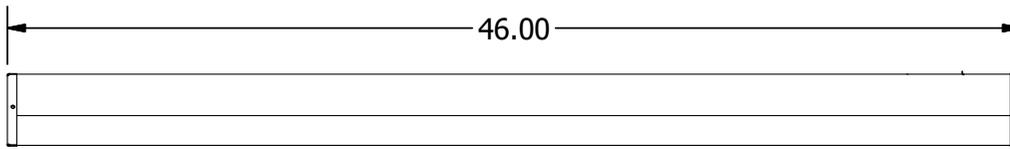

BLLA 4' End

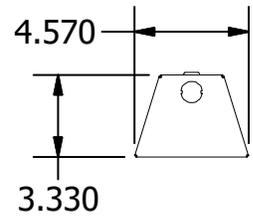

BLLA Pendant Mount

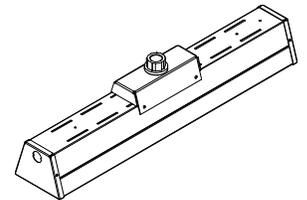

BLLA 2' Wattage

Length	Lumen Output	Actual Lumen Output	Fixture Wattage	Lumens per Watt
2'	10	9492.0	65.2	145.7
2'	12	11424.6	79.3	144.1

BLLA 4' Wattage


Length	Lumen Output	Actual Lumen Output	Fixture Wattage	Lumens per Watt
4'	14	13252.0	90.1	146.8
4'	15	14703.6	100.9	145.8
4'	18	17399.0	119.3	145.8
4'	20	18437.4	130.0	141.8
4'	24	22191.3	158.2	140.3

- * Drawings not to scale
- * Standard tolerances apply
- * Specifications may change without notice

The Ashcroft Series

BLLA - Suspended Mount High Bay


BLLA-4FT-14L-840-L67

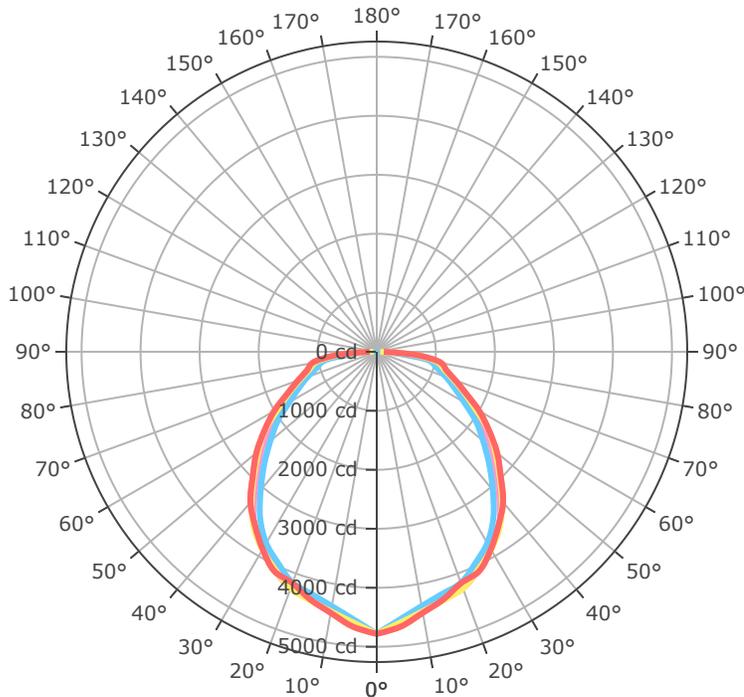

- 0.0°
- 45.0°
- 90.0°
- 135.0°
- 180.0°

Mtg Height	Light Level	Beam Diameter
6.0 ft	132.8 fc	16.5 ft
8.0 ft	74.7 fc	22.0 ft
10.0 ft	47.8 fc	27.5 ft
12.0 ft	33.2 fc	33.0 ft
14.0 ft	24.4 fc	38.5 ft
16.0 ft	18.7 fc	44.0 ft
24.0 ft	8.3 fc	66.0 ft
32.0 ft	4.7 fc	87.9 ft
40.0 ft	3.0 fc	109.9 ft
48.0 ft	2.1 fc	131.9 ft
56.0 ft	1.5 fc	153.9 ft
64.0 ft	1.2 fc	175.9 ft

BLLA-4FT-24L-840-L67

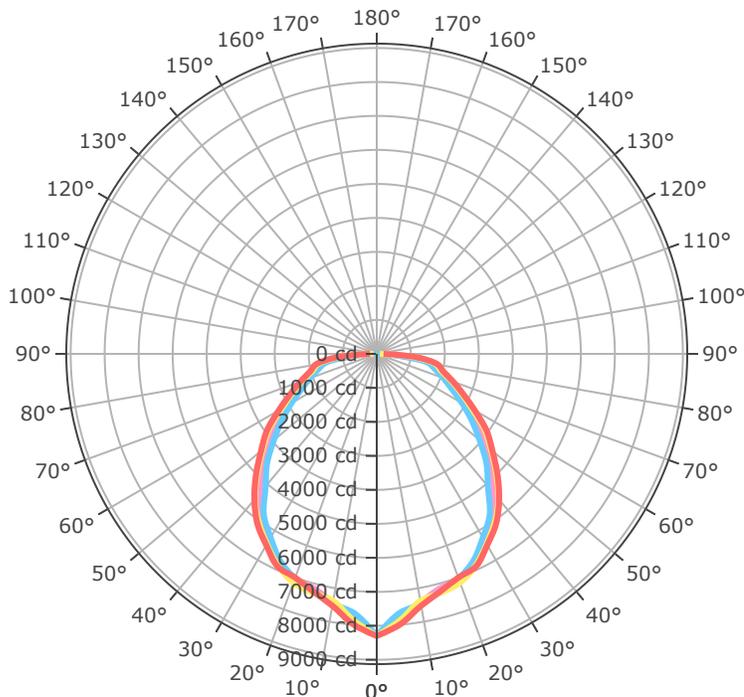

- 0.0°
- 45.0°
- 90.0°
- 135.0°
- 180.0°

Mtg Height	Light Level	Beam Diameter
6.0 ft	230.5 fc	15.9 ft
8.0 ft	129.7 fc	21.2 ft
10.0 ft	83.0 fc	26.4 ft
12.0 ft	57.6 fc	31.7 ft
14.0 ft	42.3 fc	37.0 ft
16.0 ft	32.4 fc	42.3 ft
24.0 ft	14.4 fc	63.5 ft
32.0 ft	8.1 fc	84.6 ft
40.0 ft	5.2 fc	105.8 ft
48.0 ft	3.6 fc	126.9 ft
56.0 ft	2.6 fc	148.1 ft
64.0 ft	2.0 fc	169.3 ft

The Ashcroft Series


BLLA - Suspended Mount High Bay

High Bay Lighting by **BJTAKE**
LIGHTING

Emergency Battery Plan - 20W

Emergency Lighting	Solution System Components	System Operation
Option Code 'B17' - UL 924 listed components that are factory installed in the luminaire	UL 924 listed 20-watt battery integral to the luminaire	Loss of normal power is detected by the B17 emergency light solution and the power supply is switched automatically to the 20-watt integral battery pack which powers the emergency LED lighting driver.
	UL 924 listed LED emergency lighting driver integral to the luminaire	The battery pack and emergency LED driver are UL 924 certified to provide a minimum of 90-minutes of emergency lighting.
	Wiring options for both switched and unswitched emergency lighting	

Emergency Lighting Wiring

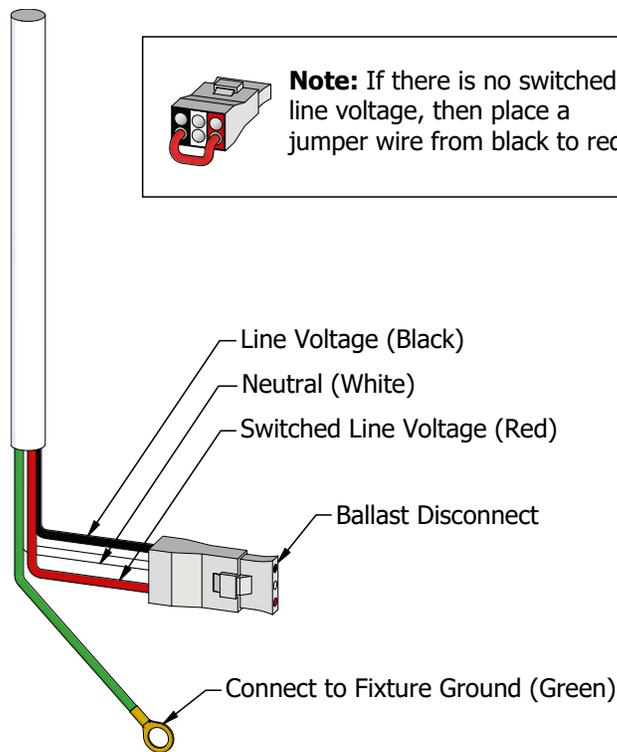

Important Information

More information on emergency lighting options and configurations available on request.



THRIVE™

Human-Centric Lighting

THRIVE™ is an **optional** natural daylight technology replacing typical CRI order codes.

Order Code	Option	Use-case
8	80 CRI	Energy-efficient, lower cost, acceptable colour rendering for general lighting applications.
9	90 CRI	More accurate, natural and vibrant colour appearance. Suitable for retail, offices, and applications where colour accuracy is of higher importance.
1	95+ CRI	Near-perfect colour fidelity, excellent for architectural, medical, retail, and other premium applications.
0	THRIVE	Human-centric lighting engineered to provide the most accurate recreation of natural daylight. Highly beneficial for healthcare, office environments, schools and other applications where all-day comfort and general well-being are top priorities.


Engineered to provide the closest match to natural light available using proprietary chip, phosphor, and packaging technology, Thrive can be used in constant colour point luminaires to bring full spectrum natural light indoors, or in tunable white luminaires to incorporate circadian elements that may impact human well-being.

The high-fidelity spectral output of Thrive creates stunning environments with excellent colour rendering and outstanding TM-30 metrics. Target applications include office, education, healthcare, retail, hospitality, architectural, museums, and residential lighting.

[Bridgelux White Paper - Average Spectral Difference.pdf](#)

The effect of the THRIVE™ spectral power distributions at a CCT of 4000K (typical for interior lighting in commercial, office, and education settings) is shown in the figure below. The reference light source at this colour temperature is firelight, represented diagrammatically as the blackbody curve (BBC) and referenced in the below figure as natural light. LEDs offering a CRI of 90 or 98 have a closer match to the blackbody curve than the 80 CRI light source. Nevertheless, across the entire visual spectrum, both light sources show a substantial deviation from the natural light BBC. This is shown in the spectral spikes (deviations above the blackbody curve) and valleys (deviations below the blackbody curve).

Spectral power distributions of LED light sources at 4000K against the blackbody curve.

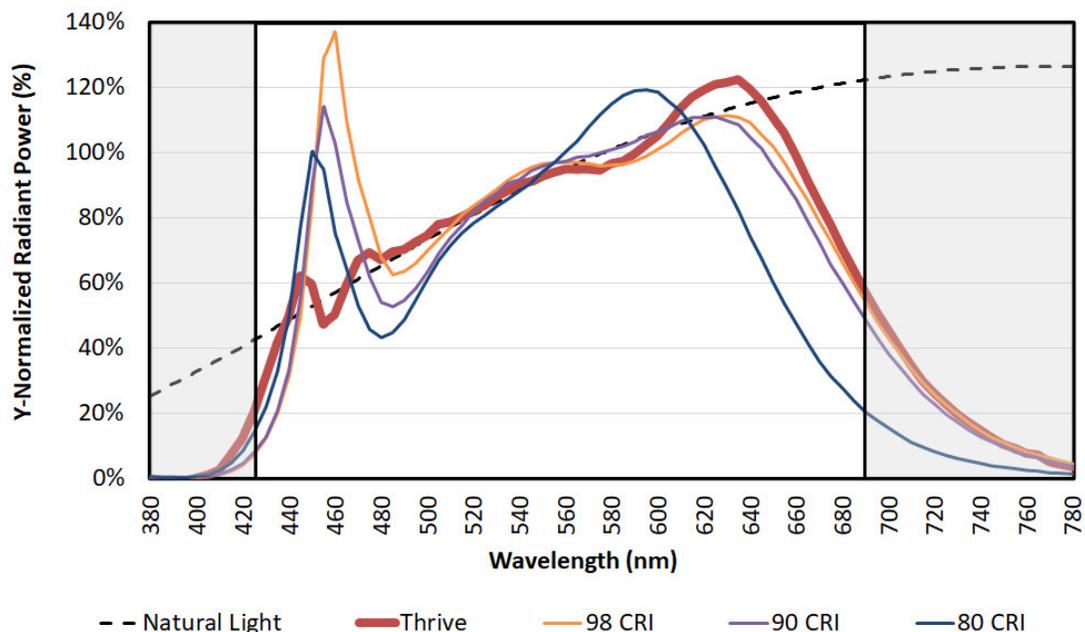

The Ashcroft Series

BLLA - Suspended Mount High Bay

High Bay Lighting by **BJTAKE**
LIGHTING

Gallery Information

Below you will find images of relevant products and configurations for the BLLA.

