

The Quinn Series

BLMQ - Wall Mount Linear

Project

Date

Part

Type



About The Quinn Series

The BLMQ is an LED linear fixture designed for wall mounting. It is well suited for indoor use where high efficiency, task lighting is required. Its narrow design and modern profile make it an ideal fixture for task lighting applications.

Specifications

Supported Voltage	120-277V, 120-347V, 347V, 480V
Available Sizes	2', 3', 4'
Lifetime	L70 of 90,000+ hours
Operating Temperature	-20°C/+25°C
Lumens	Lumen output/ft ranging from 2.5L (2500lm) to 11.5L (11500lm)
CCT	2700K, 3000K, 3500K, 4000K, 5000K, 6500K
CRI	80+ standard, 90+ and 95+ available
Dimming	0-10V Standard

Approvals

- ETL Listed
- Dry and Damp Environment Rated
- Designed and Manufactured in Canada

Warranty


- 5 Year Comprehensive, 10 Year LED

The Quinn Series

BLMQ - Wall Mount Linear

Ordering Information

Fill in the fields below with your product selections. If you need help with this section, [contact your local sales professional.](#)

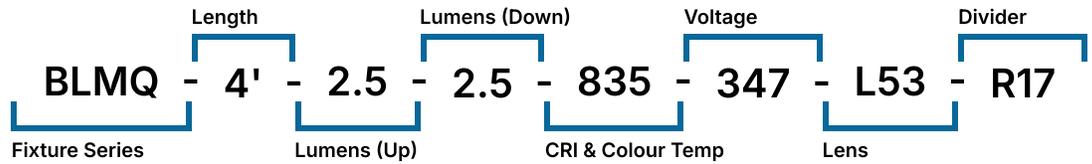

1	2	3	4	5	6					
Series	Lumens (UP)		Lumens (DOWN)		CRI	CCT	Voltage			
BLMQ	2'-1L	1,000lm	2'-1L	1,000lm	8	80	27	2700K	UNV	120-277V
	2'-1.5L	1,500lm	2'-1.5L	1,500lm	9	90+	30	3000K	347	347V
	2'-2L	2,000lm	2'-2L	2,000lm	1	95+	35	3500K	UN3	120-347V
	3'-1L	1,000lm	3'-1L	1,000lm			40	4000K	480	480V
	3'-1.5L	1,500lm	3'-1.5L	1,500lm			50	5000K		
	3'-2L	2,000lm	3'-2L	2,000lm			65	6500K		
	4'-2L	2,000lm	4'-2L	2,000lm						
	4'-2.5L	2,500lm	4'-2.5L	2,500lm						
	4'-3L	3,000lm	4'-3L	3,000lm						
	4'-3.5L	3,500lm	4'-3.5L	3,500lm						
	4'-4L	4,000lm	4'-4L	4,000lm						

Options

Down Light

BLANK | Not required

Lenses

L53 | Opal Lens

Divider

BLANK | Not required
R17 | Up/Down Light Divider

Dimming

B11 | 0-10V Dimming Leads
B12 | Line Voltage Dimming
B27 | Dim-to-off Driver
B** | Other Options Available*

Motion Sensor

W26 | Photocell Motion Sensor

Emergency Driver

B17 | UL924 10W Battery Back-up

Switches

S1 | On/Off Pull Chain
S2 | 3-Way Pull Chain

Finish

BLANK | Standard Matte White
C5 | Matte Black
CUSTOM* | Custom Colour Choice

Packaging

BLANK | Individually Boxed on Pallets
P0 | Bulk Packaging

Warranty

CL7 | 10-Year Comprehensive Warranty Upgrade

Documentation and Resources

All files and resources are available on our website for download. Files and resources are also embedded as links in this document, listed below. Additional files may be available upon request.

Please contact your local sales agent [here](#) or contact sales@bjtake.com for more information.

 [BLMQ - Photometry](#)

Certifications and Listings

Certifications that apply to this fixture and its possible configurations are listed here. More information available upon request.

Icon	Description
	Wireless Controls Available
	90 and 95+ CRI Options Available
	120-347V(UN3) Available
	ETL Listed

Usage Applications

This fixture can be used in a variety of applications, and is ideal for the following:

Usage Application
Grocery Stores
Hospitals
Manufacturing Facilities
Offices
Retail Stores
Schools
Storage Facilities
Surface Mount
Suspended


Warranty Statement

BJ Take products are tested and/or inspected prior to being packaged for shipment and are guaranteed from the day the product is shipped for a period of ten-year LED chip warranty and a five-year comprehensive component warranty. This can be upgraded to a ten-year comprehensive warranty on request.


The Quinn Series

BLMQ - Wall Mount Linear


BLMQ 2' Side

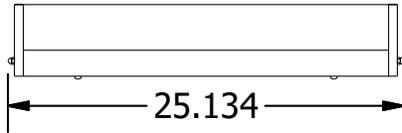


BLMQ End




BLMQ 3' Side

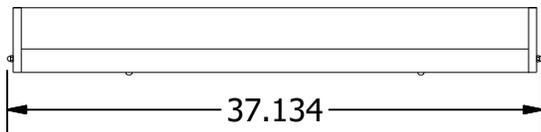


BLMQ End



BLMQ 4' Side



BLMQ End



BLR 1x4' Wattage

Length	Lumens	Wattage
4'	2.0	21.0
4'	2.5	28.0
4'	3.0	33.0

* Drawings not to scale


* Standard tolerances apply

* Specifications may change without notice

The Quinn Series

BLMQ - Wall Mount Linear

BLMQ-4'-4L-4L-840-UNV-L53 UP_DOWN LIGHT

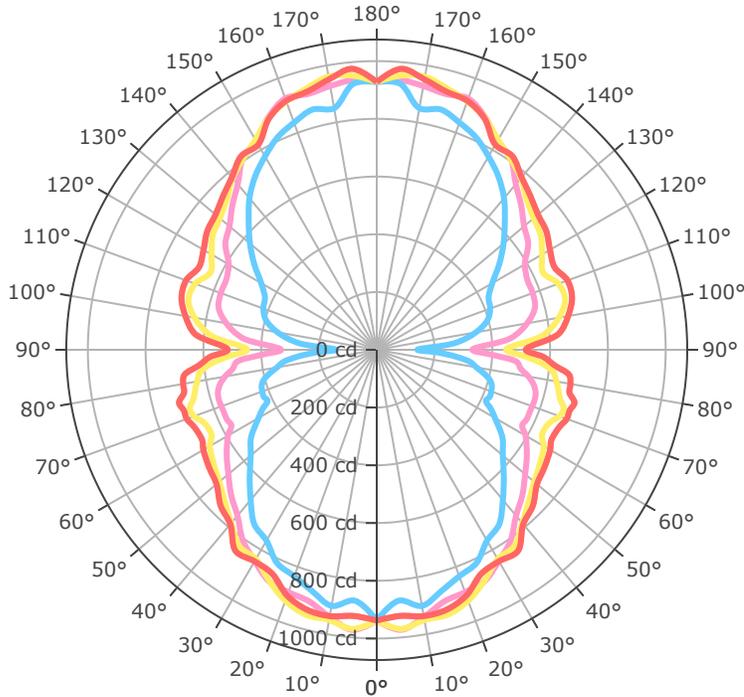


- 0.0°
- 45.0°
- 90.0°
- 135.0°
- 180.0°

Mtg Height	Light Level	Beam Diameter
6.0 ft	26.0 fc	-0.0 ft
8.0 ft	14.7 fc	-0.0 ft
10.0 ft	9.4 fc	-0.0 ft
12.0 ft	6.5 fc	-0.0 ft
14.0 ft	4.8 fc	-0.0 ft
16.0 ft	3.7 fc	-0.0 ft
24.0 ft	1.6 fc	-0.0 ft
32.0 ft	0.9 fc	-0.0 ft
40.0 ft	0.6 fc	-0.0 ft
48.0 ft	0.4 fc	-0.0 ft
56.0 ft	0.3 fc	-0.0 ft
64.0 ft	0.2 fc	-0.0 ft

Emergency Battery Plan - 10W

Emergency Lighting	Solution System Components	System Operation
Option Code 'B17' - UL 924 listed components that are factory installed in the luminaire	UL 924 listed 10-watt battery integral to the luminaire	Loss of normal power is detected by the B17 emergency light solution and the power supply is switched automatically to the 10-watt integral battery pack which powers the emergency LED lighting driver.
	UL 924 listed LED emergency lighting driver integral to the luminaire	The battery pack and emergency LED driver are UL 924 certified to provide a minimum of 90-minutes of emergency lighting.
	Wiring options for both switched and unswitched emergency lighting	

Emergency Lighting Wiring

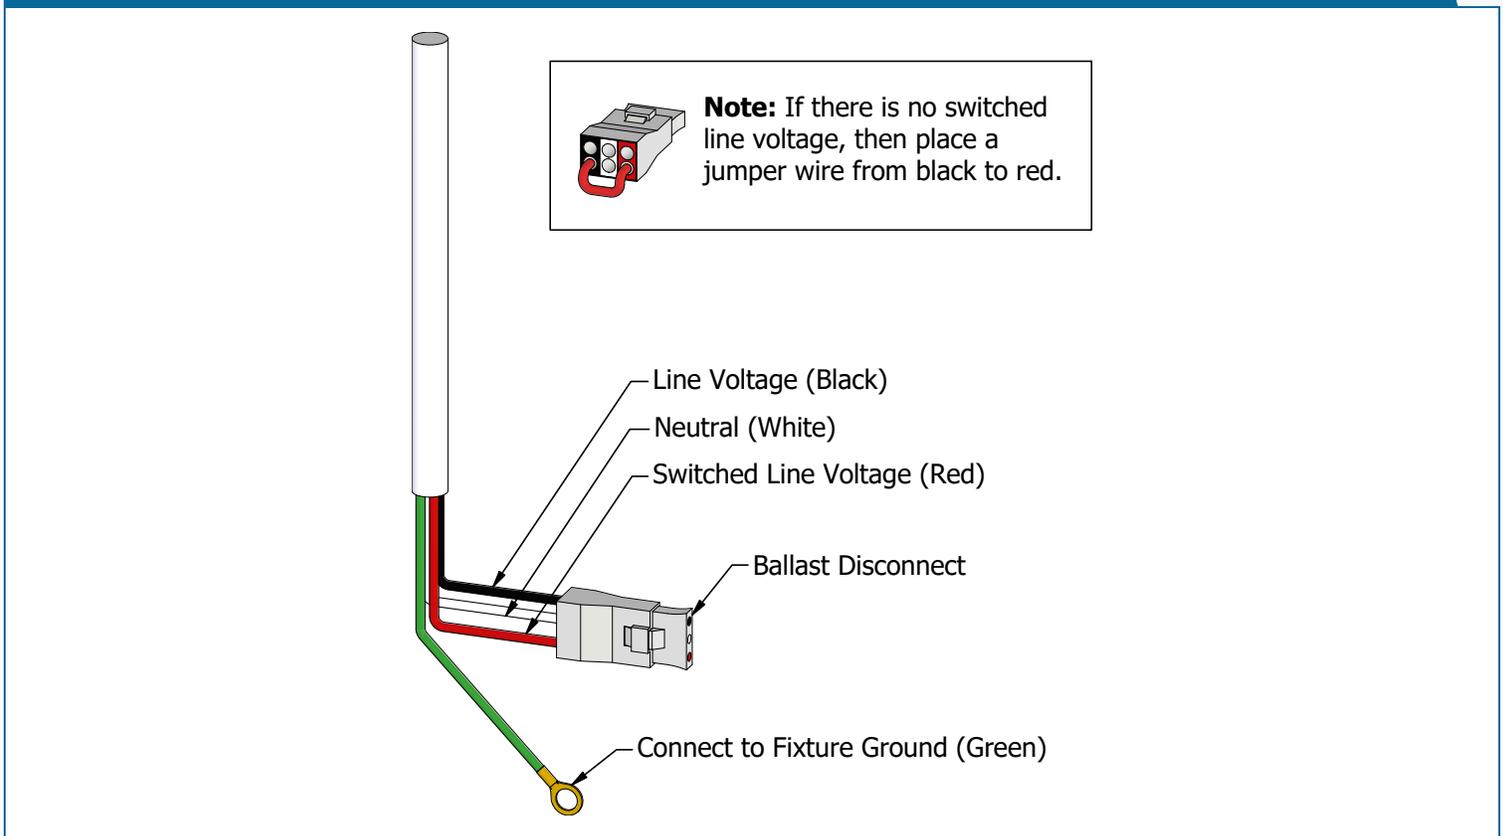

Important Information

More information on emergency lighting options and configurations available on request.

Gallery Information

Below you will find images of relevant products and configurations for the BLMQ.

