

The Taber Series

BLRT - Architectural Recessed Troffer

Project

Date

Part

Type



About The Taber Series

The BLRT comes in all common size formats and is designed as a recessed lay-in fixture for T-bar ceilings. It is well suited for office spaces, schools, and hospitals, and is available with an RGBW/RGBWW full-spectrum color and tunable-white engine for dynamic architectural and medical lighting. This luminaire is also available in common metric size formats (600x600mm, 750x750mm, 500x1500mm, 300x1200mm, 600x1200mm) and offers a wide variety of options including passive and active air handling.

Specifications

Supported Voltage	120-277V, 347V, 120-347V
Available Sizes	1x1' 1x2', 2x2', 1x4', 2x4', 20x60", 30x30", 20x20"
Lifetime	L70 of 150,000+ hours, L90 of 45,000+ hours
Operating Temperature	-20°C/+25°C (-40°/+40°C upgrade)
Lumens	2L (2000lm) to 10L (10000lm)
CCT	2700K, 3000K, 3500K, 4000K, 5000K, 6500K
CRI	80+ standard, 90+ and 95+ available
Dimming	0-10V Standard
Mounting	Holes provided for chain or hanger, and wire mounting support for T-Bar ceilings
Room-Side Serviceability	Standard on all models
RGBW / RGBWW	Full-spectrum color and tunable white

Approvals


- DLC Listed
- ETL Listed
- Made with UL Listed components
- Designed and Manufactured in Canada

Warranty

- | 5 Year Comprehensive, 10 Year LED

Ordering Information

Fill in the fields below with your product selections. If you need help with this section, [contact your local sales professional](#).

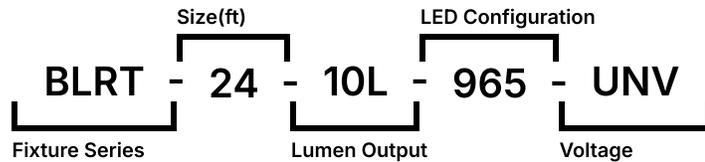

1	2	3	4	5	
Series	Size		Lumen Output	LED Configuration	Voltage
BLRT	14	1x4	1x4, 1x2	827 or 927	UNV 120-277V
	22	2x2	2L 2.5L	830 or 930	347 347V
	24	2x4	3L 3.5L	835 or 935	UN3 120-347V
	20x20		4L 4.5L	840 or 940	
	20x60		5L	850 or 950	
			2x2, 20x20	865 or 965	
			2L 2.5L	RGB-27	RGBW 2700K
			3L 3.5L	RGB-30	RGBW 3000K
			4L 4.5L	RGB-35	RGBW 3500K
			5L	RGB-40	RGBW 4000K
			2x4, 20x60	RGB-50	RGBW 5000K
			3L 3.5L	RGB-65	RGBW 6500K
			4L 4.5L	RGB2040	RGBWW 2000K-4000K
			5L 5.5L	RGB3050	RGBWW 3000K-5000K
			6L 6.5L	027 or 030	THRIVE 2700K 3000K
			7L 7.5L	035 or 040	THRIVE 3500K 4000K
			8L 8.5L	050 or 065	THRIVE 5000K 6500K
			9L 9.5L		
			10L		

95+ CRI available on request*
CRI selection unavailable with RGB*

Options

Lenses	BLANK Frosted Acrylic	Motion Sensors	WX15 Internal Dimming Low Voltage Microwave Sensor	Packaging	BLANK Individually Boxed on Pallets
Dimming	B11 0-10V Dimming Leads	WC20 Leviton Low-Voltage Sensor	W** Other Options Available*	P0 Bulk Packaging	
	B12 Line Voltage Dimming	Emergency Driver	B17 UL924 10W Battery Backup	Mounting	BLANK 15/16" T-Bar
	B22 0-10V 1% Dimming	B36 UL924 14W 2 Hour Battery Backup	F8 UL924 Emergency Relay	M15 Surface Mount Kit (packaged separately)	
	B27 Dim-to-off Driver	Air Handling	H20 Housing with Passive Air Handling	TB39 9/16" T-Bar	
	B** Other Options Available*	H24 Housing with Active Air Handling	Finish	TB39S 9/16" T-Bar (Slotted)	
Controls	WC10* Encelium Wireless Controls	BLANK Standard Matte White	C5 Matte Black	H40 Drywall Kit (packaged separately)	
	WC18* NX Wireless Controls	CUSTOM* Custom Colour Choice		Warranty	CL7 10-Year Comprehensive Warranty Upgrade
	WC19* Avi-on Wireless Controls				
	WC22* JDRF Wireless Controls				
RGBW/RGBWW Controls	WC8* DMX512/RDM BLE				
	WC12* Casambi BLE				

Documentation and Resources

All files and resources are available on our website for download. Files and resources are also embedded as links in this document, listed below. Additional files may be available upon request.
Please contact your local sales agent [here](#) or contact sales@bjtake.com for more information.

 [BLRT - Installation Instructions](#)

 [BLRT - Photometry.zip](#)

Certifications and Listings

Certifications that apply to this fixture and its possible configurations are listed here. More information available upon request.

Icon	Description
	ETL Listed
	DLC Listed
	Wireless Controls Available
	90 and 95+ CRI Options Available
	120-347V(UN3) Available

Usage Applications

This fixture can be used in a variety of applications, and is ideal for the following:

Usage Application
Hospitals
Offices
Schools

Warranty Statement

BJ Take products are tested and/or inspected prior to being packaged for shipment and are guaranteed from the day the product is shipped for a period of ten-year LED chip warranty and a five-year comprehensive component warranty. This can be upgraded to a ten-year comprehensive warranty on request.

Wattage Information

Below are the wattage tables for all imperial size formats of the BLRT.

BLRT 1x4 Wattage

Size	Lumen Output	Actual Lumen Output	Wattage
1x4	2.0	2009	14.8
1x4	2.5	2508	18.4
1x4	3.0	3005	22.1
1x4	3.5	3500	25.8
1x4	4.0	3994	29.5
1x4	4.5	4486	33.2
1x4	5.0	4977	36.8

BLRT 1x2 Wattage

Size	Lumen Output	Actual Lumen Output	Wattage
2x2	2.0	1989	14.8
2x2	2.5	2483	18.4
2x2	3.0	2975	22.1
2x2	3.5	3465	25.8
2x2	4.0	3954	29.5
2x2	4.5	4441	33.2
2x2	5.0	4927	36.8

BLRT 2x2 / 20x20 Wattage

Size	Lumen Output	Actual Lumen Output	Wattage
2x2	2.0	1989	14.8
2x2	2.5	2483	18.4
2x2	3.0	2975	22.1
2x2	3.5	3465	25.8
2x2	4.0	3954	29.5
2x2	4.5	4441	33.2
2x2	5.0	4927	36.8

BLRT 2x4 / 20x60 Wattage

Size	Lumen Output	Actual Lumen Output	Wattage
2x4	3.0	3254	21.7
2x4	3.5	3780	25.3
2x4	4.0	4300	29.0
2x4	4.5	4812	32.7
2x4	5.0	5316	36.3
2x4	6.0	6304	43.7
2x4	7.0	7263	51.0
2x4	8.0	8192	58.4
2x4	9.0	9093	65.7
2x4	10.0	9966	73.0

BLRT Light Loss Factor (LLF)


CCT	Output%
2700K	92.95
3000K	95.51
3500K	96.80
4000K	100.00
5000K	101.28
90CRI	84.72

* Actual lumen output may vary


Dimensions

Below are the drawings and measurements for imperial size formats of the BLRT.


BLRT 1x4 Side A




BLRT 1x4 Side B

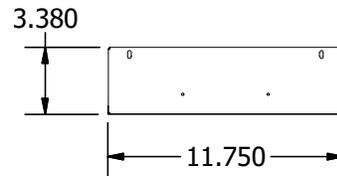


BLRT 1x2 Side A

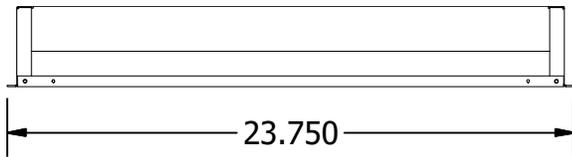


BLRT 1x2 Side B

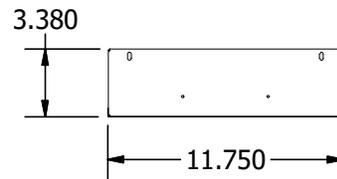


BLRT 2x2 Side A

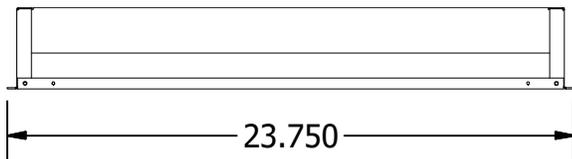


BLRT 2x2 Side B

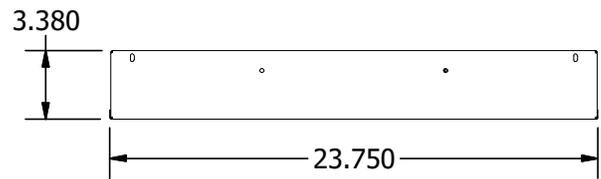

BLRT 2x4 Side A



BLRT 2x4 Side B

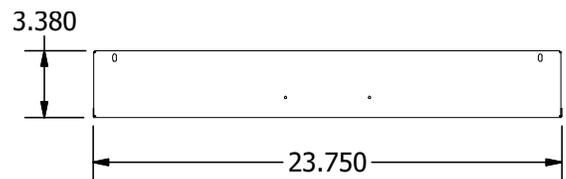


* Drawings not to scale
* Standard tolerances apply
* Specifications may change without notice


Dimensions

Below are the continued drawings and measurements for imperial size formats of the BLRT.


BLRT 20x20" Side A

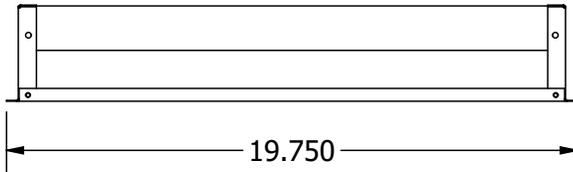


BLRT 20x20" Side B

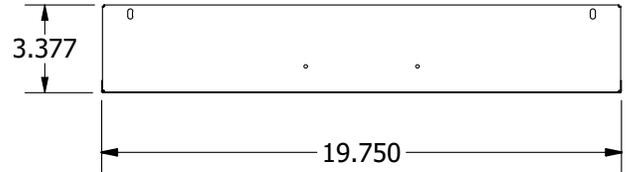

BLRT 20x60" Side A




BLRT 20x60" Side B

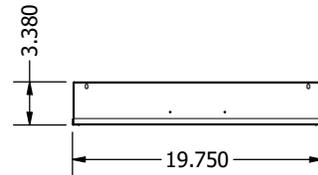

* Drawings not to scale
* Standard tolerances apply
* Specifications may change without notice


BLRT14-2L-840

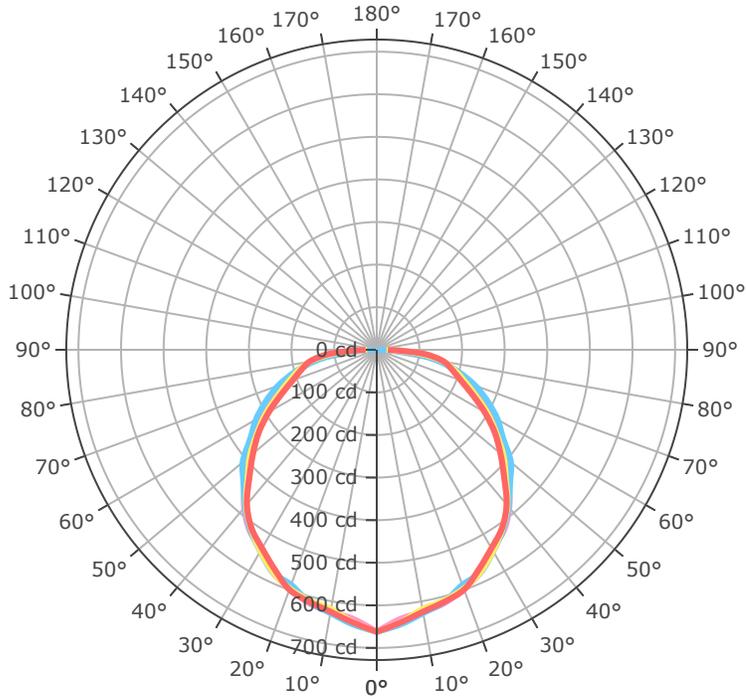

- 0.0°
- 45.0°
- 90.0°
- 135.0°
- 180.0°

Mtg Height	Light Level	Beam Diameter
6.0 ft	18.4 fc	17.6 ft
8.0 ft	10.3 fc	23.5 ft
10.0 ft	6.6 fc	29.4 ft
12.0 ft	4.6 fc	35.2 ft
14.0 ft	3.4 fc	41.1 ft
16.0 ft	2.6 fc	47.0 ft
24.0 ft	1.1 fc	70.5 ft
32.0 ft	0.6 fc	94.0 ft
40.0 ft	0.4 fc	117.5 ft
48.0 ft	0.3 fc	141.0 ft
56.0 ft	0.2 fc	164.5 ft
64.0 ft	0.2 fc	188.0 ft


BLRT14-5L-840

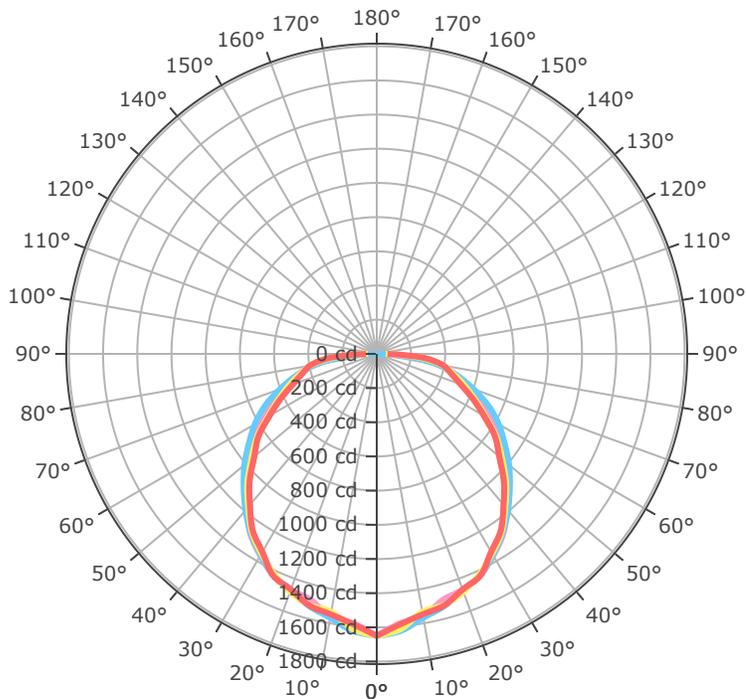

- 0.0°
- 45.0°
- 90.0°
- 135.0°
- 180.0°

Mtg Height	Light Level	Beam Diameter
6.0 ft	45.8 fc	17.7 ft
8.0 ft	25.8 fc	23.6 ft
10.0 ft	16.5 fc	29.4 ft
12.0 ft	11.5 fc	35.3 ft
14.0 ft	8.4 fc	41.2 ft
16.0 ft	6.4 fc	47.1 ft
24.0 ft	2.9 fc	70.7 ft
32.0 ft	1.6 fc	94.2 ft
40.0 ft	1.0 fc	117.8 ft
48.0 ft	0.7 fc	141.3 ft
56.0 ft	0.5 fc	164.9 ft
64.0 ft	0.4 fc	188.4 ft


BLRT22-2L-840

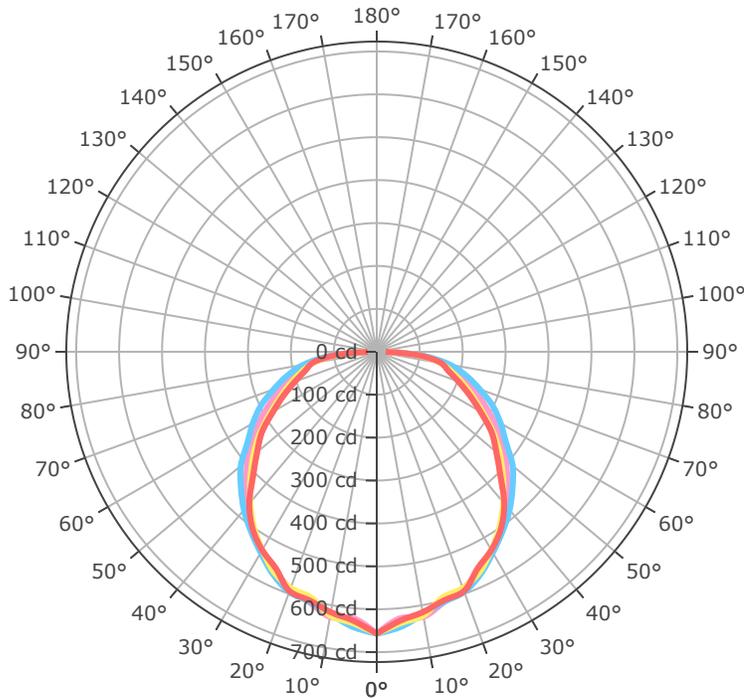

- 0.0°
- 45.0°
- 90.0°
- 135.0°
- 180.0°

Mtg Height	Light Level	Beam Diameter
6.0 ft	18.3 fc	17.0 ft
8.0 ft	10.3 fc	22.6 ft
10.0 ft	6.6 fc	28.3 ft
12.0 ft	4.6 fc	33.9 ft
14.0 ft	3.4 fc	39.6 ft
16.0 ft	2.6 fc	45.2 ft
24.0 ft	1.1 fc	67.8 ft
32.0 ft	0.6 fc	90.4 ft
40.0 ft	0.4 fc	113.1 ft
48.0 ft	0.3 fc	135.7 ft
56.0 ft	0.2 fc	158.3 ft
64.0 ft	0.2 fc	180.9 ft


BLRT22-5L-840

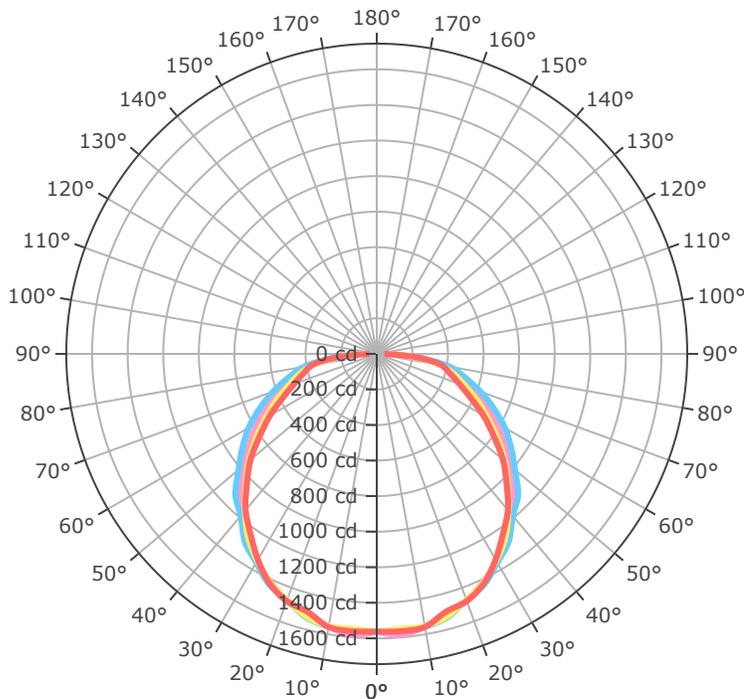

- 0.0°
- 45.0°
- 90.0°
- 135.0°
- 180.0°

Mtg Height	Light Level	Beam Diameter
6.0 ft	43.4 fc	17.8 ft
8.0 ft	24.4 fc	23.7 ft
10.0 ft	15.6 fc	29.6 ft
12.0 ft	10.8 fc	35.5 ft
14.0 ft	8.0 fc	41.4 ft
16.0 ft	6.1 fc	47.3 ft
24.0 ft	2.7 fc	71.0 ft
32.0 ft	1.5 fc	94.7 ft
40.0 ft	1.0 fc	118.4 ft
48.0 ft	0.7 fc	142.0 ft
56.0 ft	0.5 fc	165.7 ft
64.0 ft	0.4 fc	189.4 ft


BLRT24-10L-840

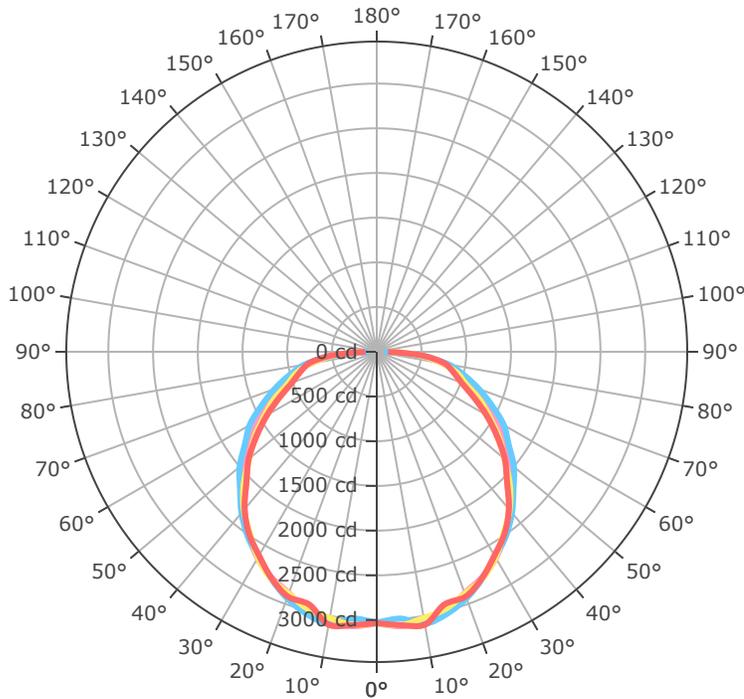

- 0.0°
- 45.0°
- 90.0°
- 135.0°
- 180.0°

Mtg Height	Light Level	Beam Diameter
6.0 ft	84.3 fc	19.0 ft
8.0 ft	47.4 fc	25.4 ft
10.0 ft	30.3 fc	31.7 ft
12.0 ft	21.1 fc	38.0 ft
14.0 ft	15.5 fc	44.4 ft
16.0 ft	11.9 fc	50.7 ft
24.0 ft	5.3 fc	76.1 ft
32.0 ft	3.0 fc	101.4 ft
40.0 ft	1.9 fc	126.8 ft
48.0 ft	1.3 fc	152.1 ft
56.0 ft	1.0 fc	177.5 ft
64.0 ft	0.7 fc	202.8 ft

BLRT24-3L-840

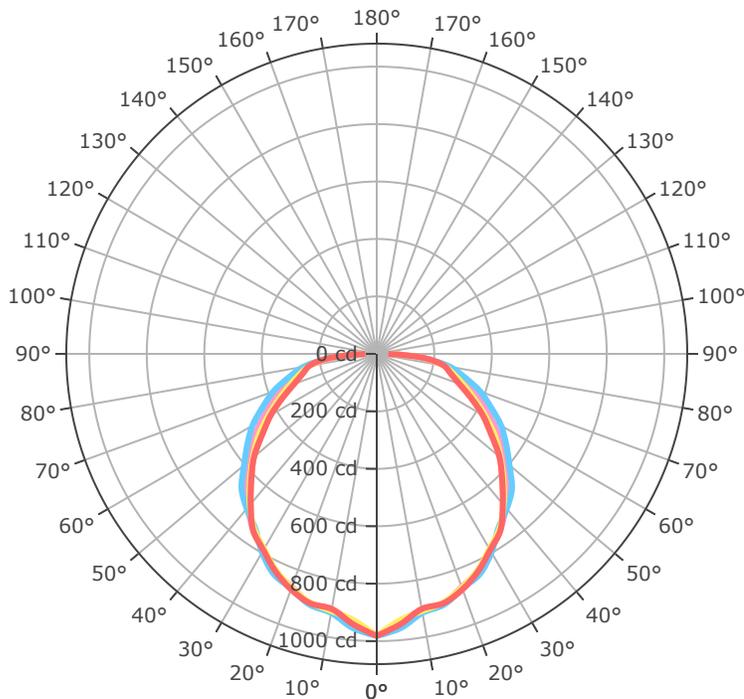


- 0.0°
- 45.0°
- 90.0°
- 135.0°
- 180.0°

Mtg Height	Light Level	Beam Diameter
6.0 ft	27.3 fc	16.9 ft
8.0 ft	15.3 fc	22.5 ft
10.0 ft	9.8 fc	28.2 ft
12.0 ft	6.8 fc	33.8 ft
14.0 ft	5.0 fc	39.4 ft
16.0 ft	3.8 fc	45.0 ft
24.0 ft	1.7 fc	67.6 ft
32.0 ft	1.0 fc	90.1 ft
40.0 ft	0.6 fc	112.6 ft
48.0 ft	0.4 fc	135.1 ft
56.0 ft	0.3 fc	157.6 ft
64.0 ft	0.2 fc	180.2 ft

Emergency Battery Plan - 10W

Emergency Lighting	Solution System Components	System Operation
Option Code 'B17' - UL 924 listed components that are factory installed in the luminaire	UL 924 listed 10-watt battery integral to the luminaire	Loss of normal power is detected by the B17 emergency light solution and the power supply is switched automatically to the 10-watt integral battery pack which powers the emergency LED lighting driver.
	UL 924 listed LED emergency lighting driver integral to the luminaire	The battery pack and emergency LED driver are UL 924 certified to provide a minimum of 90-minutes of emergency lighting.
	Wiring options for both switched and unswitched emergency lighting	

Emergency Lighting Wiring

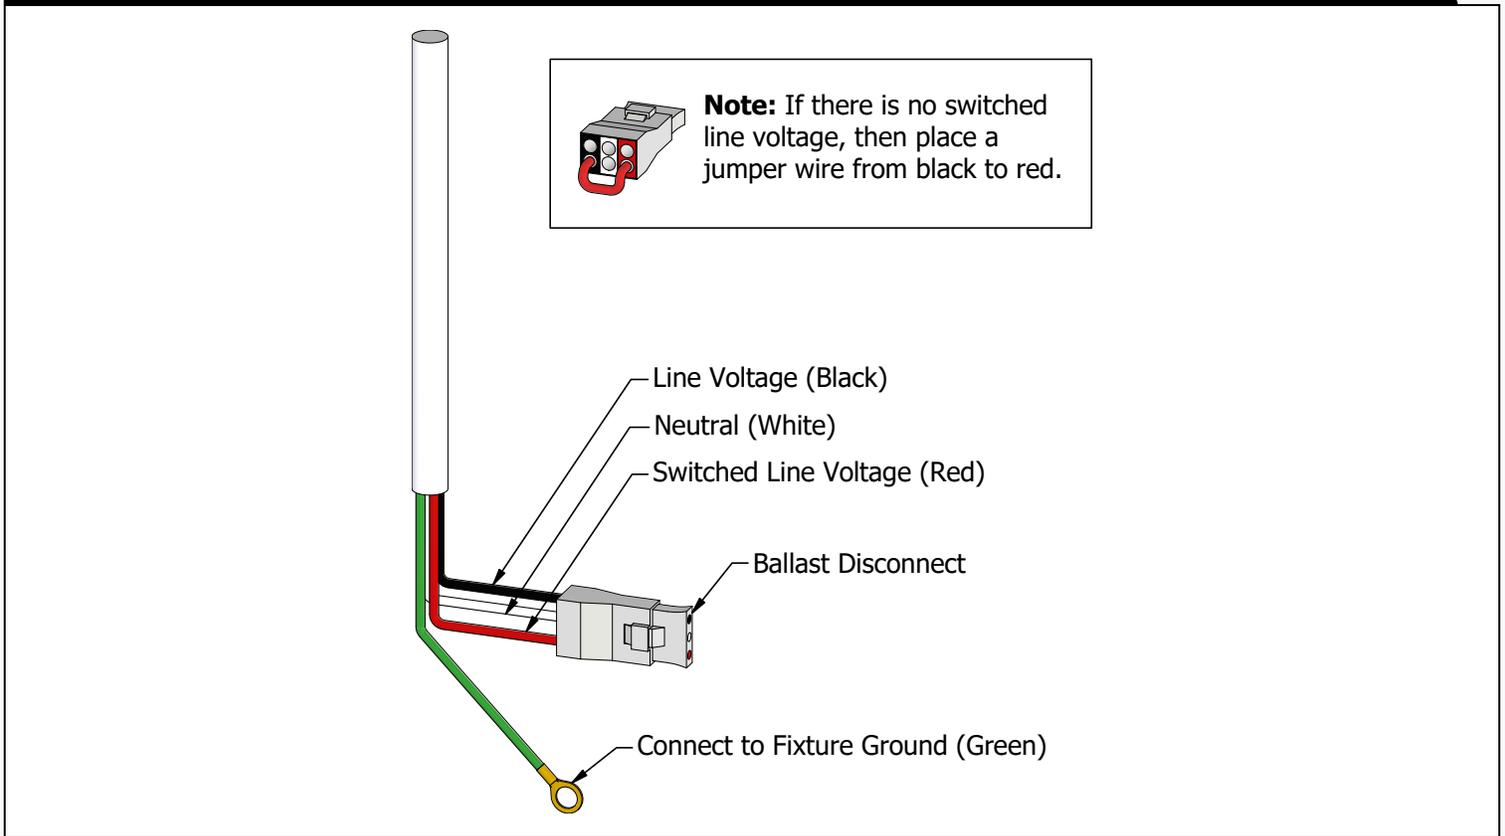

Important Information

More information on emergency lighting options and configurations available on request.



THRIVE™ is an **optional** natural daylight technology replacing typical CRI order codes.

Order Code	Option	Use-case
8	80 CRI	Energy-efficient, lower cost, acceptable colour rendering for general lighting applications.
9	90 CRI	More accurate, natural and vibrant colour appearance. Suitable for retail, offices, and applications where colour accuracy is of higher importance.
1	95+ CRI	Near-perfect colour fidelity, excellent for architectural, medical, retail, and other premium applications.
0	THRIVE	Human-centric lighting engineered to provide the most accurate recreation of natural daylight. Highly beneficial for healthcare, office environments, schools and other applications where all-day comfort and general well-being are top priorities.


Engineered to provide the closest match to natural light available using proprietary chip, phosphor, and packaging technology, Thrive can be used in constant colour point luminaires to bring full spectrum natural light indoors, or in tunable white luminaires to incorporate circadian elements that may impact human well-being.

The high-fidelity spectral output of Thrive creates stunning environments with excellent colour rendering and outstanding TM-30 metrics. Target applications include office, education, healthcare, retail, hospitality, architectural, museums, and residential lighting.

[Bridgelux White Paper - Average Spectral Difference.pdf](#)

The effect of the THRIVE™ spectral power distributions at a CCT of 4000K (typical for interior lighting in commercial, office, and education settings) is shown in the figure below. The reference light source at this colour temperature is firelight, represented diagrammatically as the blackbody curve (BBC) and referenced in the below figure as natural light. LEDs offering a CRI of 90 or 98 have a closer match to the blackbody curve than the 80 CRI light source. Nevertheless, across the entire visual spectrum, both light sources show a substantial deviation from the natural light BBC. This is shown in the spectral spikes (deviations above the blackbody curve) and valleys (deviations below the blackbody curve).

Spectral power distributions of LED light sources at 4000K against the blackbody curve.

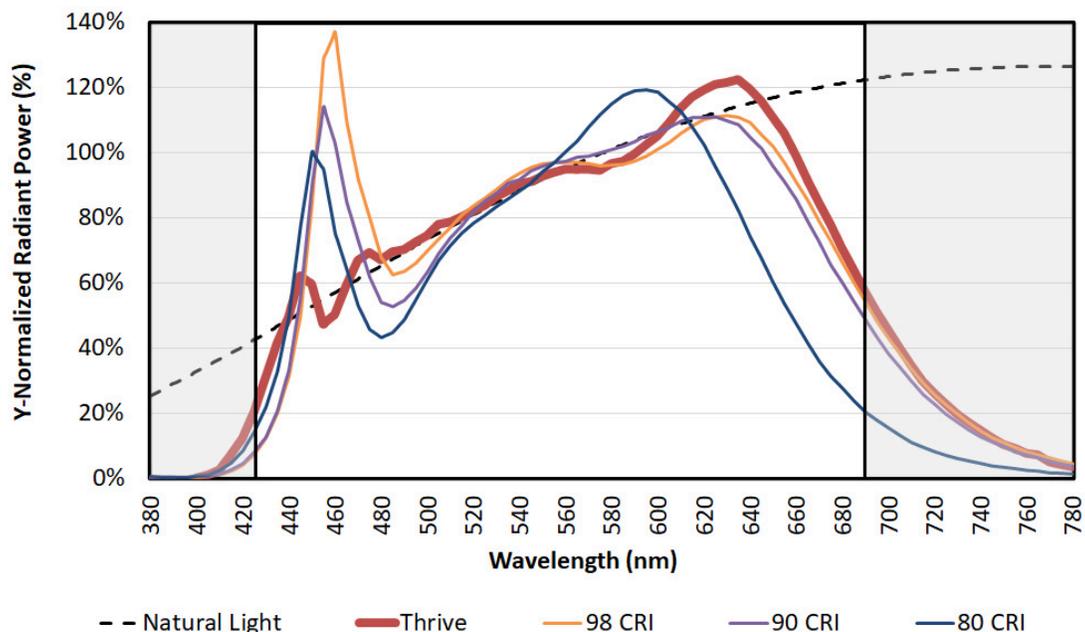

Gallery Information

Below you will find images of relevant products and configurations for the BLRT.

