

The Thorsby Series

BLCT - Linear High Bay

Project		Date	
Part		Type	



About The Thorsby Series

The BLCT is an LED linear high bay luminaire designed for suspended mounting, and is well suited for indoor use where high efficiency lighting is required.

Specifications

Supported Voltage	120-277V, 347V, 120-347V
Available Sizes	4', 8'
Lifetime	L70 of 99,000+ hours, L90 of 30,000+ hours
Lumens	1' 1.125L (1125lm) to 8' 23L (23000lm)
CCT	2700K, 3000K, 3500K, 4000K, 5000K, 6500K
CRI	80+ standard, 90+ and 95+ available
Dimming	0-10V Standard
Mounting	Holes provided for V-hangers, S-hook chain-mounting, or aircraft cables. Optional pendant mount brackets available.

Approvals

- Made with UL Listed components
- Designed and Manufactured in Canada

The Thorsby Series

BLCT - Linear High Bay

Linear High Bay Lighting
by

BJTAKE
LIGHTING

Ordering Information

Fill in the fields below with your product selections. If you need help with this section, [contact your local sales professional](#).

Length
BLCT - 4' - 5.5L - 840 - UNV - L18
Fixture Series Lumen Output Voltage

1	2	3	4	5
BLCT				
Series	Length & Lumen Output		CRI	Voltage
BLCT	1' - 1.125L	1126 lm	8	UNV 120-
	1' - 1.375L	1377 lm	9	277V
	1' - 1.75L	1755 lm	1	347 347V
	2' - 2.5L	2353 lm		UN3 120-
	2' - 3.5L	3294 lm		347V
	2' - 4.5L	4271 lm		
	4' - 2.5L	2500 lm		
	4' - 3.5L	3500 lm		
	4' - 4.5L	4500 lm		
	4' - 5.5L	5500 lm		
	4' - 6.5L	6500 lm		
	4' - 7.5L	7250 lm		
	4' - 8.5L	8500 lm		

Options

Lenses

BLANK Frosted Acrylic Lens

Cords

W3xx White 16/3 (Specify Length)

W4xx Black 16/3 (Specify Length)

W59xx White 16/5 (Specify Length)

W*** Other Options Available

Key.	Cord Length.	Key	Cord Length
6	6FT	15	15FT
10	10FT	20	20FT

Ex. W406 would be 16/3 Black, 6FT

Motion Sensors

W26 Photocell Motion Sensor

W57 Dimming Motion Sensor (dims to 50% when unoccupied)

W53* On/Off

W8* High/Low

WX16 Microwave Dimmable Sensor

W** Other Options Available

Finish

BLANK Standard Gloss White

C5 Matte Black

CUSTOM* Custom Colour Choice

Dimming

B11 0-10V Dimming Leads

B12 Line voltage dimming

B27 Dim-to-off Driver

B** Other Options Available

Controls

WC10* Encelium Wireless Controls

WC18* NX Wireless Controls

WC19* Avi-on Wireless Controls

WC22* JDRF Wireless Controls

Emergency Driver

B17 UL924 6W Battery Back-up

B24 UL924 10W Battery Back-up

B38 UL924 15W Battery Backup

F8 UL924 Emergency Relay

Packaging

BLANK Individually Boxed on Pallets

P0 Bulk Packaging

P** Other Options Available

Mounting

M1 V-Hangers

M2xx V-Hanger with Aircraft Loop Cables

M3xx Y-Toggle Aircraft Cables

M24 Single Pendant Mount(3/4 Hub)

M** Other Options Available

Key.	Aircraft Length.	Key	Aircraft Length
5	5FT	15	15FT
10	10FT	20	20FT

Ex. M305 would be Y-Toggle, 5FT

Modular Wiring

W27XYZC Modular Power Cable

Warranty




CL7 10-Year Comprehensive Warranty Upgrade

Certifications and Listings

Certifications that apply to this fixture and its possible configurations are listed here. More information available upon request.

Usage Applications

This fixture can be used in a variety of applications, and is ideal for the following:

Icon	Description
	Wireless Controls Available
	90 and 95+ CRI Options Available
	120-347V(UN3) Available

Usage Application
Manufacturing Facilities
Storage
Offices
Schools
Retail Stores
Distribution Facilities
Processing Plants
Aisle Lighting

Warranty Statement

BJ Take products are tested and/or inspected prior to being packaged for shipment and are guaranteed from the day the product is shipped for a period of ten-year LED chip warranty and a five-year comprehensive component warranty. This can be upgraded to a ten-year comprehensive warranty on request.

The Thorsby Series

BLCT - Linear High Bay

Linear High Bay Lighting
by



Wattage information

Below are the available wattage tables for the BLCT. More information is available upon request.

BLCT 4' Wattage

Size	Lumen Output	Actual Lumen Output	Fixture Wattage
4'	2.5	2500lm	17.9
4'	3.5	3500lm	5.6
4'	4.5	4500lm	33.3
4'	5.5	5500lm	40.9
4'	6.5	6500lm	48.6
4'	7.5	7500lm	56.3
4'	8.5	8500lm	63.9
4'	9.5	9500lm	71.6
4'	10.5	10500lm	79.3
4'	11.5	11500lm	86.9

BLCT 8' Wattage

Size	Lumen Output	Actual Lumen Output	Fixture Wattage
8'	5	5000lm	35.7
8'	7	7000lm	51.0
8'	9	9000lm	66.3
8'	11	11000lm	81.5
8'	13	13000lm	96.8
8'	15	15000lm	112.1
8'	17	17000lm	127.4
8'	19	19000lm	142.6
8'	21	21000lm	157.9
8'	23	23000lm	173.3

BLCT Light Loss Factor (LLF)

CCT	Output%
2700K	92.95
3000K	95.51
3500K	96.80
4000K	100.00
5000K	101.28
90CRI	84.72

* Actual lumen output may vary

The Thorsby Series

BLCT - Linear High Bay


Linear High Bay Lighting
by

BJTAKE
LIGHTING


Dimension Information

Below you will find the dimensions for both sizes of the BLCT.


BLCT 4' Side

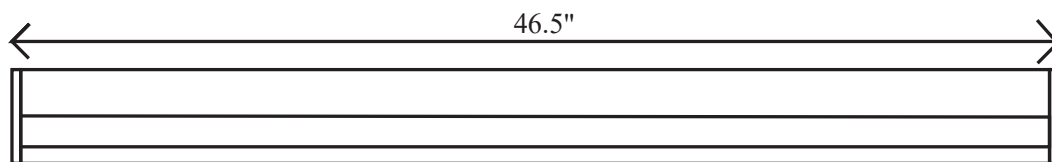


End Dimensions



BLCT 8' Side



End Dimensions



* Drawings aren't to scale

* Standard tolerances apply

* Specifications may change without notice

Gallery Information

Below you will find images of relevant products and configurations for the BLCT.

